

# 2022 Robles Fish Passage Facility Progress Report



Top photo shows the first surface water arriving in forebay of the Robles Fish Passage Facility in November 2021 after the remaining 15,300 yd<sup>3</sup> of sediment and debris, deposited during the 2019 storms, was removed in September of 2021 (bottom photos).

Casitas Municipal Water District  
1055 Ventura Avenue  
Oak View, California 93022

## TABLE OF CONTENTS

	Page
1.0 EXECUTIVE SUMMARY.....	4
2.0 GENERAL INTRODUCTION.....	5
3.0 UPSTREAM FISH MIGRATION IMPEDIMENT EVALUATION.....	8
3.1 <i>Sandbar Monitoring</i> .....	12
4.0 EVALUATE FISH MOVEMENT THROUGH THE PASSAGE FACILITY.....	15
4.1 <i>Water Velocity and Depth Validation Evaluation</i> .....	15
4.2 <i>Fish Attraction Evaluation</i> .....	16
4.3 <i>Downstream Fish Passage Evaluation</i> .....	19
5.0 DOWNSTREAM FISH MIGRATION THROUGH THE ROBLES REACH.....	20
6.0 LONG-TERM MONITORING COMPONENTS.....	21
6.1 <i>Monitor Robles Facility Operations</i> .....	21
6.1.1 Facility Status.....	21
6.1.2 Flow Observations and Control.....	25
6.1.3 Costs Associated with Operation and Monitoring.....	27
6.1.4 Water Velocity and Depth Validation Evaluation.....	28
6.1.5 Recommendations for Prioritization of Future Activities.....	28
6.1.6 Recommendations Deemed Necessary to the Operations.....	28
6.2 <i>Fish Passage Monitoring</i> .....	29
7.0 ADDITIONAL BIOLOGICAL AND ENVIRONMENTAL MONITORING STUDIES ...	35
7.1 <i>Oncorhynchus mykiss Presence/Absence Surveys</i> .....	35
7.2 <i>Adult Index Spawning Surveys</i> .....	36

7.3 *Ambient Water Quality Monitoring* ..... 38

7.4 *Estuary/Lagoon Monitoring*..... 38

7.5 *Surface Flow Monitoring*..... 39

7.6 *Photographic Index Sites*..... 40

7.7 *Underwater Video Monitoring* ..... 40

7.8 *Stranding Surveys* ..... 40

8.0 LITERATURE CITED AND BIBLIOGRAPHY ..... 41

9.0 APPENDICES ..... 47

## 1.0 EXECUTIVE SUMMARY

Casitas Municipal Water District (CMWD) is implementing the Robles Fish Passage Facility Project (Robles Fish Facility) described in the Proposed Action of the Bureau of Reclamation's Biological Assessment (BA); (USBOR 2003). The effects of the Robles Fish Facility were analyzed in the Biological Opinion (BO) prepared by the National Marine Fisheries Service (NMFS 2003a). This 2022 Robles Fish Passage Facility Progress Report, as described by the BO, is the culmination of monitoring, evaluation, and operational data collected during the reporting period of 01 July 2021 to 30 June 2022.

The monitoring and evaluation studies related to the Robles Fish Facility conducted during the 2021-2022 reporting period are included in two main sections of this progress report. The Fisheries Monitoring and Evaluation section includes: upstream fish migration impediment evaluation, sandbar monitoring at the mouth of the Ventura River, fish attraction evaluation, fish passage monitoring, downstream fish passage evaluations, and downstream fish migration through the Robles Reach. The Facility Operation section includes: information and data on the facility status, flow observations and control, costs associated with operation and monitoring, assessment of the effectiveness to provide fish passage, recommendations of priorities for future activities, and revisions deemed necessary to the operations.

Below normal precipitation occurred in the Ventura River Basin during the 2022 fish passage season. No BO-defined storm events occurred at the Robles Fish Facility. The sandbar at the mouth of the Ventura River was open for the entire fish migration season and provided opportunity for steelhead passage through the lower mainstem Ventura River. No *Oncorhynchus mykiss* were detected passing through the Robles Fish Facility. The dry conditions allowed time to complete many maintenance and repair activities at the Robles Fish Passage Facility needed for proper operation.

## 2.0 GENERAL INTRODUCTION

The National Marine Fisheries Service (NMFS) listed the southern California steelhead, *Oncorhynchus mykiss*, as endangered in 1997 (NMFS 1997) under the Endangered Species Act (ESA, 16 U.S.C. § 1531 et. seq.) of 1973, as amended. Steelhead were organized into stocks (i.e., groups) of evolutionary significant units (ESU) that were considered to be substantially reproductively isolated from other steelhead stocks and were an important part of the evolutionary legacy of the species. The southern California steelhead ESU included, at that time, steelhead populations from the Santa Maria River in San Luis Obispo County south to Malibu Creek in Los Angeles County. The ESU was later extended to the US/Mexican border in San Diego County during 2002 (NMFS 2003b). In a later delineating approach, NMFS categorized the anadromous life history form of *O. mykiss* as a distinct population segment (DPS) as described under the ESA (NMFS 2005). The DPS policy differs from the ESU by delineating a group of organisms by “marked separation” rather than “substantial reproductive isolation” as originally listed. In the case of *O. mykiss* of the southern California steelhead ESU, this marked separation between the two life history forms was considered valid because of physical, physiological, ecological, and behavioral factors related to its anadromous life history characteristics. Both resident and anadromous *O. mykiss*, where the two forms co-occur and are not reproductively isolated, are still part of the ESU; however, the anadromous *O. mykiss* (i.e., steelhead) are now part of a smaller subset identified as the southern California steelhead DPS. Anadromous *O. mykiss* in the southern California DPS exhibit a winter-run life-history pattern during their spawning migrations; see life history discussion below.

Rainbow trout (*O. mykiss*) can be generally organized into four large groupings (Behnke 1992; Scott and Crossman 1973): 1) coastal rainbow trout that extend from northern Baja California to northern Alaska near the Kuskokwim River and also the Kamchatkan Peninsula of northeastern Asia, 2) redband trout of the inland Columbia and Frazer River basins, 3) redband trout of the central valley of California, and 4) trout of the Gulf of California drainages. The taxonomic group of coastal rainbow trout, *O. m. irideus*,

exhibit two life history forms; anadromous and resident. The common name for the anadromous life history form is “steelhead trout” and the resident form are “rainbow trout”. Throughout the range of coastal rainbow trout, the anadromous life history form is widespread (Behnke 1992). There are two general life-history patterns exhibited by adult anadromous steelhead based on when they return from the ocean to spawn in fresh water. The life-history patterns are grouped by either summer or winter spawning runs. There are many exceptions to these patterns, but this general characterization has been used to group steelhead runs by the season in which peak spawning immigration occurs from the ocean (Busby et al. 1996). Summer-run steelhead are generally found in river systems that drain from farther inland, such as the Columbia River basin. Winter-run steelhead are typically found in the coastal systems where river systems are smaller. The winter-run pattern is the more common of the two anadromous life histories within the natural range of the species (Busby et al. 1996).

#### *Monitoring and Research of the Robles Diversion and Fish Passage Facility*

As stated in the BO (NMFS 2003a), the “Modifications to the Robles Diversion Facility and associated operation criteria have been targeted at improving fish passage conditions within the Robles Reach of the Ventura River while maintaining suitable conditions through the Fish Passage Facility.” The monitoring and evaluation studies and activities related to the modification of the Robles Facility, as outlined in the BO (NMFS 2003a), were intended to achieve three main objectives:

- I. Monitor Fish Passage Facility operations and performance.
- II. Determine if the Fish Passage Facility functions and operates in such a fashion that migrating steelhead:
  - a. Successfully navigate into and through the facility, and
  - b. Move through the facility in good physical condition.
- III. Determine if the operations at the Robles Diversion are enhancing the opportunity for:
  - a. Adult steelhead to migrate upstream to the Robles Facility, and
  - b. Smolts and kelts to migrate downstream through the Robles Reach.

### 5-year Reevaluation of Initial Evaluation and Monitoring Activities

As described in the BO, a 5-year reevaluation of the initial fish flow operations would be conducted to determine if monitoring and evaluations have been completed (NMFS 2003a). The initiation of the 5-year period began in 2006, which was the first year the Robles Fish Facility was fully operational. An annual and ongoing reevaluation began after the 2010 fish passage season. Through the Cooperative Decision Making Process, the Robles Biological Committee will review annually each of the specific evaluations and determine if the original objectives have been addressed and could be discontinued or if additional study would be needed. Due to the variable streamflow conditions and insufficient numbers of adult and juvenile steelhead, all objectives of the monitoring and evaluation program have not yet been accomplished. This was exacerbated by the historic 5-year exceptional drought affecting much of California, and in particular, the southern coast of California that includes the Ventura River Basin. After the 2017 season, the drought in the Ventura River basin had diminished to a moderate level, which continued through 2018 and into 2019. At the start of the 2021 fish passage season, severe drought returned to the basin and increased to an exceptional level by the end of the season. Similarly, at the start of the 2022 fish passage season, drought was considered moderate and finished the season at an extreme level (US Drought Monitor).

Each aspect of the monitoring and evaluation program is assessed annually to determine if sufficient information has been collected to accomplish each objective. While significant progress has been made to date, it is recommended that several aspects of the monitoring and evaluation for the Robles Fish Facility be continued during 2023. Sufficient data have been collected for the upstream fish migration impediment evaluation to begin data analysis; the final results will be used to make recommendations for long-term fish flow operations.

### 3.0 UPSTREAM FISH MIGRATION IMPEDIMENT EVALUATION

#### Introduction

The ability of adult steelhead to swim upstream can be impeded during migration at times of low-river flow (NMFS 2003a). Evaluations at shallow water habitat units (i.e., critical riffles) have commonly been conducted to determine if passage impediments exist for adult and juvenile steelhead in California rivers (Dettman and Kelley 1986; Bratovich and Kelley 1988; Hagar 1996). The Robles Reach, which extends downstream from the Robles Fish Facility approximately 6.5 km (NMFS 2003a) to just upstream of the Santa Ana Boulevard bridge (Appendix 1), is a wide alluvial section of the Ventura River that is composed of active wash deposits of unconsolidated silt, sand, gravel, and boulders (Tan and Jones 2006). Because of this channel morphology and geology, alluvial channels like the Robles Reach have high infiltration rates and cause surface flow to rapidly recede and cease relatively quickly after rain events (Cooke et al. 1992).

An initial assessment of Ventura River potential passage impediments in relation to river discharge was completed by ENTRIX (1999). The physical characteristics of seven potential impediments were evaluated using the Thompson (1972) passage criteria. The Thompson (1972) passage criteria for adult steelhead at critical riffles is a water depth of 0.6 ft for 25% of the total transect width and a continuous portion equal to 10% of the total transect width. ENTRIX (1999) also evaluated the potential impediments using criteria of 0.5 ft and 0.6 ft depth for 25% of the total width and a total width of 8 ft for both depths. The resulting discharge required to meet critical criteria was estimated to be between 40 and 65 cfs. There have been several modifications to the Thompson passage criteria by other researchers; Dettman and Kelly (1986) on the Carmel River used a depth of 0.6 ft over a 5 ft continuous section, a criteria of 0.6 ft depth over an 8-ft section was used on the Santa Ynez River (SYRTAC 2000), and Harrison et al. (2006) used a criteria of 0.6 ft depth over a 10-ft section on the Santa Clara River. Thompson's (1972) depth criterion of 0.6 ft was not based on actual migration observations and

never validated as a minimum condition for passage. Adult salmonids have been observed passing through riffles shallower than the 0.6 ft criterion (Mosley 1982).

The objective of the impediment evaluation is to assess factors that may impede steelhead migrating upstream to the Robles Fish Facility (NMFS 2003a). Because low-river flows have the potential to impede upstream fish migration in the Robles Reach, characterizing the effect of flows on critical riffles in this reach will be the primary focus of the impediment evaluations (NMFS 2003a).

### Methods

Selected channel features that may pose an impediment to upstream passage were surveyed multiple times during the fish migration season (January through June) to measure water depth, velocity, and channel width along a transect at each site. The selected sites were planned to be surveyed over a range of discharges from approximately 30-171 cfs (with the upper limit dependent on the ability to safely conduct the surveys), which was correlated with discharge at the Robles Fish Facility. The number of repeated surveys has depended on the number and duration of significant rain events, rate of hydrograph recession, previous surveys, and time constraints due to other aspects of the monitoring and evaluation program. Impediment surveys have been conducted over a number of years given the natural variation of water conditions. The currently selected impediment sites (Appendix 2) were resurveyed multiple times to develop a statistically rigorous data set, given the natural variability of discharge, to evaluate fish passage in relation to Robles Fish Facility discharge.

### *Site Selection Process*

During the initial phase, the Ventura River was surveyed from the mouth to the Robles Fish Facility (23 km) using standard stream survey techniques and was completed in 2008 (CMWD 2008). This provided physical measurements of all habitat units for the selection process. The survey methodology followed Moore et al. (2002) and was

equivalent to a level IV survey as described in the California Salmonid Stream Habitat Restoration Manual (Flosi et al. 2002).

Over the course of three meetings and one conference call between 24 January and 18 June of 2009, the Biological Committee (BC) for the Robles Fish Passage Facility completed an impediment site selection process that culminated in the original selection of eight sites that would be monitored for the impediment evaluation. The BC reviewed physical parameters of the 379 habitat units surveyed and general river characteristics that included: unit type, length, width, water depth, slope, longitudinal location (river km), step height on step units, discharge at Foster Park and the Robles Fish Facility at the time of the surveys, and a river profile for the 23 km of the Ventura River below the Robles Fish Facility. Upon completion of initial assessment of the data, a list of potential sites was developed that the BC visited in the field on 27 May 2009 to determine if monitoring was warranted. This field and data assessment included regular BC members (at the time of the assessment) Mike Kinsey (BOR), Stan Glowacki (NMFS), Mary Larson (CDFW), and Scott Lewis (CMWD). Mike Gibson (CMWD), hydrologists Bob Hughes (CDFW), and David Crowder (NMFS) also participated in this assessment and selection process.

A flow event that peaked on 20 March 2011 at approximately 20,000 cfs at the USGS Foster Park gage station, a recurrence interval of about 6 years, significantly altered some impediments sites that necessitated modifications to the monitoring. See CMWD (2011) for a detailed description of the high-flow caused site alterations. A Biological Committee (BC) field assessment on 11 January 2012 was conducted to review alterations that occurred and select replacement sites for ones that no longer appeared to be impediments. Regular BC members (at the time of the assessment) Ned Gruenhagen (BOR), Rick Bush (NMFS), Mary Larson (CDFW), and Scott Lewis (CMWD) participated in this review and site-selection process; Mike Gibson (CMWD) and hydrologist Bob Hughes (CDFW) were also involved in this assessment and selection process. Based on this field review, Site 2 was no longer considered a potential impediment due to channel degradation. Site 10 was identified as a

replacement site during the January 2012 field trip. Site 8, which was originally selected during dry conditions, was not considered as restrictive as other potential sites after evaluating data collected during 2010 and 2011. Consequently, Site 8 was replaced with Site 9 during the January 2012 field trip. The complete list of current impediment sites that the BC visited and determined to be satisfactory for monitoring during the 2012 season can be found in Appendix 3. However, at the time new site selections were made (i.e., 11 January 2012), insufficient flows were available to make final site selection or transect placements. Until March of 2014, the lack of precipitation and subsequent insufficient surface flow did not allow for confirmation of these new sites as potential passage impediments. This confirmation was completed after a March 2014 storm provided the first notable surface flows in 3 years and allowed available members of the BC to visit sites 9 and 10 on 03 March 2014. The confirmation was conducted by Scott Lewis (CMWD), Dana McCanne (CDFW), and Mike Gibson (CMWD).

### *ENTRIX Study Site Assessments*

An effort was made to locate and determine the status of the ENTRIX (1999) study sites during 2009. Because there were numerous bed-mobilizing runoff events after the study was completed, the status of all study sites was unknown. Based on the site descriptions in the ENTRIX (1999) study report, field surveys were conducted to locate and describe the existing channel conditions at the original site locations. Of the 7 sites originally identified by ENTRIX (1999), only 4 sites were located with some degree of confidence. Of those 4 sites, all were no longer in the primary low-flow channel. A more detailed description of the ENTRIX sites can be found in a previous progress report (CMWD 2011).

### Results

During the reporting period for 2022, no BO-defined storm events occurred. River flows were less than the targeted priority discharges of the remaining impediment study sites (Appendix 3). The targeted priority discharges are generally > 100 cfs, however the

largest mean daily release from Robles never exceeded 26 cfs during the 2022 fish passage season. Therefore, no water depth transects were conducted during the 2022 fish passage season.

### Discussion

Data sampled from the population of sites identified as “critical riffles” will be pooled for evaluation to inform recommendations on flows to facilitate fish passage. This includes data collected over 6 seasons and a range of discharges. All impediment sites will be pooled by site and across all years for this initial analysis step. Pooling the data broadly will characterize the full range of data collected at the different impediment sites across a range of hydrologic conditions. All previous impediments will be included for this initial analysis.

Exploratory data analyses are needed to determine the most appropriate and informative methods for analyzing the data, including data pooling, any needed data transformations, other model explorations, outlier determinations, and final model ranking and selection. This process will proceed on a parallel track within the BC, culminating in flow recommendations to the Management Committee based on the BC’s evaluation.

### *3.1 Sandbar Monitoring*

#### Introduction

The Ventura River, like many other California rivers, frequently develops a seasonal sandbar at the mouth during the late spring or summer that is breached by higher river flows in the late fall or winter. If a sandbar develops, which occurs more often during dry years, the resulting lagoon can provide important rearing habitat for steelhead juveniles because of the abundant food resources available. Additionally, this can

facilitate the physiological and behavioral changes associated with smoltification (Cannata 1998) and also enhance marine survival (Bond et al. 2008).

The primary objective of the sandbar monitoring is to determine if the criteria for initiation of the fish passage augmentation season have been met (NMFS 2003a). As stipulated in the BO, the fish passage augmentation season extends from 01 January through 30 June of each year and commences after the sandbar has been breached at least once during the current year's fish flow operations season. During the fish passage augmentation season, several Robles Fish Facility operation criteria must also be implemented (see NMFS 2003a for a complete list of operational criteria).

### Methods

During each sandbar inspection, observations and recordings were made that included: date, time, status of the sandbar, general location of the mouth, tidal stage, water temperature, and discharge at the Robles Fish Facility and the USGS Foster Park gage station. The sandbar was open on 04 January 2022 and its status was monitored once every two weeks through June 2022. Outside of the fish passage augmentation season the sandbar was monitored at least monthly.

### Results

During the reporting period, the mouth of the Ventura River was inspected 18 times to determine if the sandbar was open or closed. There were 12 observations made during the fish passage augmentation season (January through June 2022) and 6 observations made outside of the season. The sandbar was open on 04 January 2022 through 30 June 2022 for volitional fish passage (Appendix 4). On days the sandbar was inspected during the reporting period, the mean daily discharge at the USGS Foster Park gage station and the Robles Fish Facility ranged from approximately < 1 to 11 cfs and 0 to 20 cfs, respectively. The sandbar was closed during 4 of the 6 observations from July-November of 2021. The sandbar was open during the entire 2022 fish passage season and the river was only observed exiting from the east side of the estuary.

## Discussion

The sandbar at the mouth of the Ventura River tends to remain open during average to above average precipitation years and closes only during years with few significant rain events. During years with this typical pattern, the sandbar remains open during the fish passage season from January through June (Appendix 5). This pattern commonly includes a period, during the summer and fall, when the sandbar is closed. A single low precipitation year can produce longer periods of closure (e.g., 2007, 2012, 2016, and 2018). Commonly, consecutive dry years cause the sandbar to persist into the fish passage season, opening only for short periods after rain events (e.g., 2013-2015).

The tendency of the sandbar to remain open during the fish passage season, in all but very dry years, is likely due to several factors. Although the middle reach of the Ventura River goes dry every year, subsurface water continues to flow during most years and eventually begins to resurface upstream of the confluence with San Antonio Creek. This water resurfacing continues increasing to a location slightly downstream of the San Antonio Cr. confluence. Additionally, tributary flow from San Antonio Creek contributes to the Ventura River through a surface or subsurface connection throughout the year. Finally, treated effluent water from the Ojai Valley Sanitary District at 7.5 rkm increases the discharge by about 3 cfs. Continued lower evapotranspiration caused by the Thomas Fire and above average rainfall in 2019 have together likely contributed to longer periods of surface/subsurface flow and the open sandbar. These hydrologic and geomorphic features have produced longer surface water in the lower Ventura River and prevent the sandbar from fully forming. Thus, the sandbar has remained open during most fish passage seasons, which has been approximately 80% of the time.

The status of the sandbar indicates changes in the estuary/lagoon that may help determine potential entry and exit conditions for adult steelhead and juvenile *O. mykiss*, respectively. It appears passage conditions remain suitable during most seasons when steelhead are typically immigrating and smolts are emigrating. However, lagoon conditions optimal for smaller juvenile rearing and growth (i.e., when the sandbar closes

and causes the estuary to form into a deeper freshwater lagoon; Bond et al. 2008) appear limited during most years for the study period beginning in 2006.

#### 4.0 EVALUATE FISH MOVEMENT THROUGH THE PASSAGE FACILITY

##### 4.1 Water Velocity and Depth Validation Evaluation

No performance testing or evaluations occurred during the 2022 fish passage season because of insufficient flows into the Robles Fish Facility (Table 1).

Table 1. Performance testing completion status and remaining priorities.

Component	Completed/ Year	Flow Required	Required Flow duration	Anticipated completion	Comments	Completed By	Priority- Flows 30-50 cfs	Priority Flows 700 cfs +
Screens	Yes/2011	671 cfs in channel				Consultant		
Diversion Flume	Yes/2006							
Fishway Vertical Slots	Yes/2018	25-35 cfs in Fishway ( <b>34 cfs</b> )	24 hours			Casitas		
	Yes/2020	50 cfs in fishway ( <b>50 cfs</b> )	24 hours			Casitas		
	No	50 cfs in fishway + 121 cfs in Auxiliary Pipe	24 hours	After 121 cfs is achieved through the Auxiliary Pipe	River must flow at 2000 cfs for 24 hours to accomplish this task	Casitas		7
Fishway Entrance Gates	Yes/2018	25-35 cfs in Fishway ( <b>#5 @ 34 cfs</b> )	24 hours			Casitas		
	Yes/2018	50 cfs in fishway ( <b>#5 @ 44 and 50 cfs, #4 @ 50 cfs</b> )	24 hours			Casitas		
	No	50 cfs in fishway + 121 cfs in Auxiliary Pipe ( <b>#5 @ 72 cfs, #4 @ 72 cfs, 2019</b> )	24 hours	After 121 cfs is achieved through the Auxiliary Pipe	River must flow at 2000 cfs for 24 hours to accomplish this task	Casitas		3
Auxiliary Water	No	121 CFS in Aux Pipe	24 hours	After 121 cfs is achieved through the Auxiliary Pipe	River must flow at 2000 cfs for 24 hours to accomplish this task	Casitas		4
Entrance Pool	No	400-600 cfs in spillway ( <b>400 cfs spill and 50 cfs ladder method testing, 2019</b> )	8 hours	After 121 cfs is achieved through the Auxiliary Pipe		Casitas		1
	No	1200-1500 cfs in spillway	8 hours	After 121 cfs is achieved through the Auxiliary Pipe		Casitas		2
	No	2500-3500 cfs in spillway	8 hours	After 121 cfs is achieved through the Auxiliary Pipe		Casitas		6
Interim Rock Weirs	Yes/2017	20 cfs	4 hours			Casitas		
	Yes/2017	30-40 cfs	4 hours			Casitas		
	Yes/2017	50 cfs	4 hours			Casitas		
Fish Guidance System	No	671 cfs in channel	4 hours			Casitas		8
Forebay	No	1000-2000 cfs	4 hours			Casitas		5
High Flow Fish Exit	Yes/2006	150-200 cfs in channel	4 hours		HF has a continuous read flow meter	Casitas		
	No	600-700 cfs in channel	4 hours			Casitas		9
Low Flow Fish Exit	Yes/2018	20-40 cfs ( <b>26 cfs</b> )	2 hours			Casitas		

## 4.2 Fish Attraction Evaluation

### Introduction

River discharge is one of several key environmental factors initiating and facilitating migration of adult and juvenile steelhead, and other salmonids, in natural fluvial environments (Shapovalov and Taft 1954; Banks 1969; Spina et al. 2005). As adults and juveniles approach fish passage facilities, suitable discharge and water velocities are needed to ensure successful passage (Clay 1995; Beeman and Maule 2001).

The entrance of the fish ladder for the Robles Fish Passage Facility is located approximately 20 m downstream of the spillway gates and is where fish migrating upstream enter and downstream migrating fish exit the facility (i.e., two-way passage facility). The downstream end of the ladder is adjacent to a large pool (entrance pool). The fish ladder downstream entrance was designed for a maximum discharge (i.e., attraction flow) at the entrance of 171 cfs (50 cfs through the entire ladder and an additional 121 cfs supplemented at the lower end of the ladder). The reach downstream of the fish ladder entrance is comprised of habitats that steelhead may use during migrations. The distance downstream from the entrance pool to the lower most rock weir is approximately 200 m. This reach includes all four rock weirs and the facility's discharge measurement weir, which also functions as a low-flow road crossing. The habitat types in this reach include the four pools created by the weirs, a glide created by the discharge measurement weir, a riffle, and the entrance pool.

The objective of the fish attraction evaluation is to determine if adult or juvenile steelhead are holding immediately downstream of the Robles Fish Facility during the fish passage augmentation season (NMFS 2003a).

## Methods

Three separate methods that covered a range of spatial and temporal scales were employed to determine the presence of *O. mykiss* for the Fish Attraction Evaluation. The methods used included: 1) Weekly bank/snorkel surveys during the fish passage season, 2) post-storm bank/snorkel surveys in the entrance pool during the BO-defined ramp-down period, and 3) post-storm underwater video monitoring at the fish ladder entrance during the ramp-down period.

1) Weekly bank/snorkel fish attraction surveys, a methodology used since 2007, were conducted during the fish passage season from January through June of 2022 when water was present; dry conditions were documented when they existed at any location. The study reach included 200 m downstream and 140 upstream of the fish ladder. The particular survey methodology used (i.e., bank or snorkel) was determined based on water visibility, river discharge, expected steelhead life history stage present at the time of the survey, and safety of surveyors. A combination of bank and snorkel surveys were conducted during the 6-month period. Bank surveys were conducted by one or two surveyors in an upstream direction. The surveyors wore polarized sunglasses to reduce water-surface reflection. Snorkel surveys were conducted by one or two surveyors in an upstream direction. When present, fish species are identified and enumerated to the greatest extent possible permitted by the ambient river conditions and fish densities at the time of each survey. If *O. mykiss* were present, lengths of each fish was estimated to the nearest cm if only a few individuals (generally < 10) were present. In order to collect additional information that may help determine *O. mykiss* upstream and downstream movements through the Robles Fish Facility, an upstream study reach was added in 2009. The upstream study reach included observations in the screenbay of the facility and the area immediately upstream of the low-flow fish exit in the forebay. The total distance of this upstream reach was approximately 140 m.

2) Post-storm bank/snorkel surveys were conducted in the entrance pool during the ramp-down period for all BO-defined storms. This consisted of daily surveys during the

10-12 day augmentation period after a storm event. Beginning the day after a BO-defined peak event, a Secchi depth was measured in the entrance pool to determine when surveys could begin. Bank surveys were conducted when visibility was poor and snorkel surveys were conducted after visibility increased (> 1.0 m Secchi), assuming this would allow *O. mykiss* to be observed.

3) The post-storm underwater video monitoring was conducted after a BO-defined storm and during the ramp-down period. After the storm event occurred, video cameras were installed at the entrance of the fish ladder. The video cameras were mounted on a bracket adjacent to the fish ladder entrance and lowered into place to provide monitoring following the storm event. The cameras recorded the entire 10-12 day ramp-down period to a digital video recorder (DVR) and reviewed at a later date.

### Results

1) A total of 23 surveys (17 bank and 6 snorkel) were completed during the weekly surveys and no *O. mykiss* were observed (Appendix 6). During the 6-month period, a total of 7,660 m was surveyed by either bank or snorkel methods. Water temperatures during the study period ranged from 10.0 °C to 24.4 °C and turbidity ranged from 0.1 to 15.0 NTUs when the surveys were conducted. The mean daily discharge at the Robles Fish Facility ranged from 0 to 20 cfs at the time of the surveys.

2) No BO-defined storm events occurred during 2022 and therefore no post-storm fish attraction surveys were completed.

3) No BO-defined storm events occurred during 2022 and therefore no post-storm underwater video monitoring was conducted.

### *4.3 Downstream Fish Passage Evaluation*

#### *Introduction*

Salmonid fish passage evaluations have been conducted throughout the western United States for many years (Odeh 2000). Methods used to determine if a facility is operating as designed and not causing harm to the intended fish species vary. Early work typically entailed trapping and tagging fish before entering a facility and recapturing them after exiting. Trapping and visual inspections for injuries, PIT tagging, radio telemetry, and acoustical telemetry have been conducted extensively as well.

There are two objectives for the downstream fish passage evaluation. The first objective is to determine if downstream migrants are successfully passing through the Robles Fish Facility. The second objective is to capture and examine steelhead smolts and kelts to determine if injuries are occurring as they pass downstream through the Robles Fish Passage Facility (NMFS 2003a).

#### *Methods*

For a full description of evaluation methods, see section 5.0.

#### *Results*

No evaluations for the Downstream Passage Evaluation were conducted during 2022. The trap was not installed because there was no surface-flow connection downstream of the Robles Fish Passage Facility.

## 5.0 DOWNSTREAM FISH MIGRATION THROUGH THE ROBLES REACH

### Introduction

When the number of fish physically handled for a study is of concern, such as with an endangered species, radio telemetry can be a useful method over others like extensive trapping (Hockersmith et al. 2000). Telemetry information of emigrating steelhead smolts in the Ventura River could provide estimates of survival, travel time and rates through select reaches, migration relative to river discharge, habitat use, and passage success through critical riffles. By tracking tagged fish until the transmitter batteries are fully discharged, it is anticipated that downstream emigration can be monitored to the Ventura River estuary/lagoon, which could contribute to an understanding of estuary rearing, if any, and final emigration to the ocean.

The purpose of the downstream migration evaluation is to determine how successful smolts are at migrating through the Robles Reach (NMFS 2003a). Because of the limited number of steelhead smolts likely passing downstream through the facility, a NMFS approved pilot study using radio telemetry was used for evaluations.

### Methods

A weir trap was to be placed and operated approximately 40 m downstream of the Robles Fish Facility. The weir trap consists of a live-box (120 cm for all three dimensions) with an internal fyke. The trap was to be situated in the center of the river channel and thalweg. The live-box internal frame is constructed of PVC pipe and covered with plastic fencing with 1.9-cm diagonal openings. A plastic fence (3-cm openings) supported by T-bar fence posts was to be extended upstream on both sides of the live-box at 30° angles into the river channel. A 1-m gap on the right bank was designed so any adult steelhead could bypass the trap location and move upstream. Because the vast majority of downstream steelhead migrants were expected to be captured from mid-March through mid-June (Shapovalov and Taft 1954; Dettman and

Kelley 1986), the trap was intended to be operated from mid-March through June 2022 or until water temperatures exceeded a daily mean of 22 °C, which could negatively impact captured fish (SYRTAC 2000), or the surface water connection was lost in the mainstem of the Ventura River. For a full description of evaluation methods, see the 2022 CMWD monitoring and evaluation study plan (Lewis and Gibson 2022).

## Results

As noted previously, the trap was not installed and operated during 2022 and therefore no *O. mykiss* were captured during 2022.

## 6.0 LONG-TERM MONITORING COMPONENTS

### 6.1 *Monitoring Robles Facility Operations*

#### 6.1.1 Facility Status

The 2021-2022 water year was a below average rainfall year as measured in Matilija Canyon. The 21.12 inches of rain measured at the Matilija Canyon Ventura County station (through 19 September 2022) was 62.0% of the average annual rainfall. No BO-defined storm events occurred during 2022 and yet surface flow over the measurement weir was present until 06 June 2022; likely related to the Thomas Fire effects.

Previous annual reports identified several projects, repairs, or significant maintenance to be completed or reported on as to their current status. The principal projects were:

- Install/repared Sontek IQ pipe flow meter in the auxiliary water supply pipe.

The flow meter had numerous communication issues during 2019 that needed to be resolved before the 2020 season; however, water levels did not recede sufficiently to access the supply pipe for repairs until fall 2021. The inspection revealed calcification buildup on the transducers, which were cleaned. A

redundant Sontek meter will be installed at the upstream end of the Auxiliary pipe in fall 2022.

- Maintenance and repair of auxiliary water supply system.

Due to the sustained water levels in the lower sections of the fish ladder, necessary maintenance was not completed until fall 2021. This included calcification removal from the Auxiliary diffuser grating by pressure washing, sediment removal from fish ladder entrance box, sediment removal from upstream of Auxiliary diffuser panels (i.e., behind the panels), and repair of panels. Some of the panels had separated from their mounting frames, likely due to forces from sediment accumulation.

- Maintenance of screenbay, fish screens, and fishway.

Dry conditions starting in the summer of 2021 allowed for deferred maintenance items in the screenbay area to be completed. Calcification buildup (1/8"-2") within the horizontal section of the upstream portion of the fishway was media blasted on both sides of the fishway. The downstream side of the fish screens (i.e., behind the screens) and fish guidance device were also media blasted to remove calcification. Sediment in the screenbay was removed by hand once conditions were dry. Finally, all 15 vertical slot sills were cleaned, scraped/chiseled free of calcification, and lubed to ensure proper operation during periods of low flow.

- Level and flow sensors repair, replacement, and modifications.

Level sensors at the fish ladder entrance were programed to read water levels in the entrance pool. Previously this item was not successfully completed due to presumed sensor and SCADA limitations. However, CMWD contracted with a SCADA technician during late 2019 and early 2020 who was able to use the existing level sensors to record this data. Additionally, the technician provided numerous updated monitoring and control modifications to the Robles SCADA system. These included: ability to monitor the entrance pool elevation directly, auxiliary

and fishway gate position displayed on SCADA PC screen, and backup fishway flow calculation from elevation. Additionally, many of the primary monitoring and controls can now be tracked or adjusted from the CMWD office without being on-site and provides more refined operations. It is assumed the original sensors are reaching their working life limit and will be replaced with radar sensors as the budget allows. Through June of 2022, three of the original seven ultrasonic water level sensors have been replaced with radar sensors. Additionally, a new Sontek flow meter was installed in the fishway during 2020 and has remained operational. During 2022, two new radar level sensors will be installed downstream of the fish screen baffles (i.e., behind the baffles) on both sides (i.e., east and west) to monitor water levels and will be used to determine effectiveness of prototypes and general diversion efficiency. Radar level sensors are more accurate, dependable, and less affected by temperature variations.

- New diffuser perforated panels for the fish screens and auxiliary water supply. During the 9 BO-defined storms in 2019 and three during 2020, the new diffuser perforated panels did not become obstructed with debris as they previously had. It appears at this time that the new diffuser panels have corrected the issue of debris obstruction and causing reduced flows. Continued observations will be conducted to verify their effectiveness. The diffusers were opportunistically cleaned while the facility was shut down for sediment removal in 2019 and only low levels of debris were present. They will continue to be monitored during future storms.
- Prototype evaluation of screen cleaning modifications. Two vertical fish screens were replaced with horizontal screens during 2020 (one on each side of the V-screen). This, along with several other modifications were intended to be installed for evaluation. A screen back-wash system was not installed because of the expected chance for significant rain and cost of the system. Double brush arm screen cleaners were installed on the west-side of the V-screen during late 2020 and early 2021. After installation of all brush arms, a significant amount of

time was needed to adjust and evaluate all components of the brush cleaning system. This included adjusting individual strips of bristles to the screen face, counterweight amounts, cable guides, cable tension, and cable sheaves. Most of these evaluations were facilitated by the use of a tension dynamometer that measured and recorded cable load to ensure the cleaning system was not exceeding design specifications.

On 14 December 2021, during a small storm event, preliminary debris samples from the fish screen were collected to be used as a possible metric to determine the effectiveness of various screen cleaning modifications. Four rounds of sampling occurred, at 5 sampling locations, over an 8-h period when diversion through the fish screens was 150-400 cfs. Samples collected during the rising limb and near peak flow showed no gross differences between sampling locations. Samples collected during the receding limb of the storm event when discharge passing through the screen was lower and little debris was collected. Further data collection is needed to determine if debris sampling of the fish screen is a viable method to evaluate the effectiveness of various screen cleaning modifications. In addition, velocity measurements across the face of the fish screen were also taken during debris sampling, however it was determined the flow meter was not capable of measuring approach velocities, only sweeping velocities. A new velocity meter was purchased in 2022 as soon as this was realized (SonTek FlowTracker®2, Acoustic Doppler Velocimeter), although no BO-defined storm events occurred to collect any additional measurements. However, velocity tests in flowing water did verify that the FlowTracker2 could measure water velocities simultaneously in the two perpendicular planes required.

- Forebay sediment removal. Approximately 35,000 yd<sup>3</sup> of sediment in the Robles forebay was removed and placed downstream of the cut-off wall during November of 2019. The remaining 15,300 yd<sup>3</sup> of excess sediment was not

removed in 2020 due to budget and Covid-19 Pandemic constraints, but instead was removed during September-October of 2021.

- Auxiliary pipeline box debris cover. To prevent debris from entering the auxiliary water supply, a perforated aluminum plate with ¼” holes was installed on top of the grating, which has 1” x 3” openings. The grating covers the access opening of this area for maintenance and repair. During spill, at high discharges, the entrance pool water elevation is higher than the top of the fish ladder and water floods into the lower portion of the fish ladder, which allows debris to enter through the 1” x 3” openings of the grating. Once in the auxiliary system, debris larger than the baffle holes becomes impinged and could reduce flow from of the auxiliary system into the fish ladder. The cover was installed in November of 2020 after BOR completed a “no effect” determination in October 2020. Since installation, river discharge has not been large enough to determine the effectiveness of this debris cover.

### 6.1.2 Flow Observations and Control

Flow and level measurement devices are located at various locations within the Robles Fish Passage Facility. The primary points for measuring and recording stream flows entering, flowing through, and leaving the Robles Fish Passage Facility are:

- Matilija Creek at Matilija Hot Springs—located approximately 2,100 feet downstream of Matilija Dam with good rating for low to moderate flows and operated by Casitas Municipal Water District, formerly a USGS station. The gage data is now remotely accessible by CMWD after communication upgrades. A second gaging station at this location is operated by Ventura County and has intermittent operational issues. It was operational throughout the 2022 fish passage season.
- Matilija Dam Stage Bubbler—located at the dam, this gage provides the lake elevation. Under high flows, the dam acts as a weir. This is one of the primary

locations to determine when a hydrograph peak has occurred during a storm. Ventura County extended the bubbler line to a lower elevation in the fall of 2020 to capture future downloads and drawdowns to the water inlet level.

- North Fork Matilija Creek—located approximately 3,000 feet upstream of its confluence with Matilija Creek with good rating for low to moderate flows, but does have intermittent operational issues. It is operated by the Ventura County Watershed District.
- Robles-Casitas Diversion Canal—located on the diversion canal approximately 1,300 feet downstream of the Robles headworks in a trapezoidal channel with a good rating for flows up to 600 cfs.
- Ventura River near Meiners Oaks (VRNMO or Measurement Weir)—located approximately 540 feet downstream of the Robles Fish Passage spillway at a concrete weir section with good rating to 100 cfs, use of equations above 100 cfs with no verifications at higher flows above 1000 cfs. This is the most reliable flow measurement for releases with a 50-year plus record and a former USGS site.
- Fish Ladder—Sontek IQ Plus has been added to this location to measure flow in the fish ladder. It operated normally with ongoing assessment.
- Auxiliary Water Supply—Sontek IQ Pipe has been installed to obtain flow measurements in the auxiliary water supply. It has had intermittent operational issues, but because water remained in the lower fish ladder through 2020, an inspection was not done until the summer of 2021. The inspection only revealed calcification buildup on the transducers, which were cleaned. A redundant Sontek meter will be installed at the upstream end of the Auxiliary pipe in 2022.

All discharge instrumentation can suffer from inaccuracies caused from clogging of bubbler lines, electronic creep, debris or calcification accumulating on sensors, changes to the measured cross sections, vandalism, or equipment problems. For this reason, the data is verified against field measurements and observations when available. The information gathered from each of these locations has been summarized as mean daily flows (Appendix 7). The mean daily Robles Fish Facility discharge and corresponding

turbidity and temperature measurements for the entire fish passage season are presented in Appendix 8.

Noticeable sediment deposition did not occur in the Robles forebay, and no sediment-related issue occurred in the screenbay during 2022. Only minimal suspended sediment settled into the screenbay, which was removed (see above).

*Critical Drought Protection Measures*—No BO-defined storm events occurred during 2022 and therefore no CDPM downloads were conducted. Three rain events during December 2021 were the only sources of divertible water during the reporting period. Operation of the Robles Fish Passage Facility during this period was conducted under the “Trial Operating Criteria” as described in the BO from July through December of each year. Matilija Dam and CDPM-related activities did occur during the reporting period. During the fall of 2021, Ventura County installed a slide barrier to block the inlet structure sluice gates and limit sediment and debris from entering the structure. This also limits the lower reservoir elevation, when sufficient inflow occurs, to the top of the inlet structure (per DSOD requirements). Additionally, Casitas replaced several components of the 36” outlet pipe valve due to internal gear failure. The 36” valve is the primary outlet for larger flows (< 250 cfs) from Matilija Dam. Lastly, the BC began meeting in 2021 to start developing Stage 5 CDPM that will be implemented once Stage 5 storage is reached in Lake Casitas.

### 6.1.3 Costs Associated with Operation and Monitoring

The BA/BO specified that CMWD provide the costs that are associated with the activity. The following is a summary estimate of direct costs incurred by CMWD during the 2021-22 fiscal year:

- **Fisheries Monitoring:**

Salaries & Benefits	\$ 583,248
Equipment/Material	\$ 36,563
Outside Contracts	\$ 20,060

- **Facility Operations:**

Salaries & Benefits	\$	13,538
Equipment/Materials	\$	11,491
Outside Contracts	\$	6,774
<u>Continued</u>		
Utilities	\$	3,560
Permit	\$	652
  
- **Capital Improvements:**

Forebay Restoration	\$	321,228
Facility repairs/replace	\$	69,843
Outside Contracts	\$	48,192

#### 6.1.4 Water Velocity and Depth Validation Evaluation

Water velocity data were not collected in the fish passage facility during the 2022 fish passage season. No BO-defined storms occurred to provide the needed Robles Fish Passage Facility inflows for remaining evaluation objectives, which generally would need > 400 cfs (see section 4.1). All future performance testing will be completed in general accordance with the NMFS approved Performance Evaluation Program and Biological Committee priorities in section 4.1, Table 1.

#### 6.1.5 Recommendations Regarding the Prioritization of Future Activities

The Robles Fish Facility has completed its 17th season of operation. An assessment of the current fish screens and cleaning system was initiated to determine if modifications could be made to improve fish passage and diversion operations. A prototype evaluation plan was completed and distributed to the BC for review during 2019 and implementation of the evaluation plan was ongoing for the 2022 fish passage season.

#### 6.1.6 Recommendations Deemed Necessary to the Operations

Forebay sedimentation caused significant operational issues during 2019 and much of the sediment was removed during 2019, the remaining sediment was removed during

the fall of 2021. Casitas continues to recommend the 16-weir project remain on hold until final plans for Matilija Dam Removal Project are completed. These plans include a High Flow Sediment Bypass as part of the removal project that will likely require significant facility modifications to the Robles Fish Passage Facility project area and have not been completed. A committee is currently developing sediment bypass alternatives to be designed, evaluated, and selected.

## 6.2 Fish Passage Monitoring

### Introduction

Monitoring of migratory fish moving through fish passage facilities has been conducted using many different methods that include: visual counting, trapping and hand counting, continuous video recording, PIT tagging, radio telemetry, and acoustical telemetry. In each fish passage application, the particular physical and biological conditions (e.g., variable discharge, turbidity, debris, size of facility, and number of fish) usually dictate which method would be most effective. New technologies have been employed to improve fish passage monitoring in turbid conditions specifically. One such monitoring device is the Vaki Riverwatcher® (Riverwatcher). The Riverwatcher has the capability to operate in greater turbidity than more traditional monitoring equipment. Because of this advertised capability, the Riverwatcher was selected to be used in the Robles Fish Facility by the Technical Advisory Group during original facility design.

The primary objective of fish passage monitoring is to provide a long-term index of upstream adults and downstream kelts migrating through the Robles Fish Facility (NMFS 2003a). Although the Riverwatcher has the ability to detect smolt-sized steelhead, the manufacturer recommends it for monitoring fish with body depths  $\geq 40$  mm (Vaki 2003). Consequently, it was not known how well it would work at detecting smolt-sized fish given the debris load of the Ventura River (NMFS 2003a).

## Methods

Fish migrating upstream and downstream through the Robles Fish Facility were monitored using the Riverwatcher. The Riverwatcher is located in the fish bypass channel, which is the channel between the fish ladder and fish screens. The Riverwatcher consists of two scanner plates with light diodes that transmit beams of infrared light through the water to a corresponding receiver plate. When a fish swims (or debris drifts) through the infrared light beams, it breaks the light signal and a digital silhouette of the fish is recorded on a computer. Other data recorded when the Riverwatcher scanner is triggered are: date and time, total length (TL) of the fish (from a length/height ratio), swimming speed (m/sec), and direction of the fish movement (upstream or downstream). Additionally, the scanner triggers an underwater camera to record a 10-second video clip (25 frames/sec). Based on this recorded information, all detections are reviewed and classified (see below and Appendix 9).

The Riverwatcher was experiencing technical issues related to malfunctioning video communication during the 2015 monitoring season and was sent to Vaki for servicing. Through diagnostic testing, Vaki concluded no repairs were necessary and did not experience any issues with malfunctioning video. Vaki stated recent improvements to the Riverwatcher system could be integrated into older systems and recommended upgrading the Robles Riverwatcher. This recommendation was discussed and approved by BC members at the 2015 committee meeting. The primary upgrade was changing from an analog camera to a digital camera. In conjunction with updated software, the camera now records video for both upstream and downstream detections. Additional upgrades to the Riverwatcher included: white and infrared lights, cabling, multiplexor, and power supply. To improve video detection of fish, an additional camera was installed and is located upstream of the Riverwatcher scanners in an aluminum tunnel below the Riverwatcher camera. A second DVR camera is located above the Riverwatcher and pointed at the scanner plates. These two DVR cameras are independent of the Riverwatcher system and have to be reviewed separately for detections. The digital cameras recorded continuously at 12 frames/sec and capture

about 5 weeks of data until the DVR data storage drive is full. Once the DVR memory is full, it can be exchanged with a second DVR and data can be reviewed.

The Riverwatcher scanner and cameras are positioned at the bottom of an aluminum frame (crowder) covered with 1/2-inch aluminum bars, spaced 1 1/2 inches on center resulting in 1-inch spacing between the bars, which directs the fish to swim between the scanner plates. The crowder can be raised and lowered in guide slots of the fish bypass channel with the aid of an A-frame hoist for cleaning or repair. The Riverwatcher is usually operated during the entire flow augmentation season as long as sufficient water elevations in the fish bypass are present and debris and turbidity are low enough so the crowder will not be damaged and the Riverwatcher will function properly. During periods of higher debris loads, cleaning and inspections occur multiple times per day. Cleaning and inspections occur once every 2-3 days during periods of low debris.

Prior to 2010, each upstream and downstream Riverwatcher detection was reviewed and classified as either: an adult steelhead, *O. mykiss* non-adult steelhead, other species if identifiable, unknown fish, fish probable, or false detection (see Appendix 9 for detection classification flow chart). At the request of NMFS, this classification system was modified during the review process of the 2010 progress report. It is NMFS' belief that supporting data do not exist to distinguish between the resident *O. mykiss* and anadromous steelhead. All confirmed *O. mykiss* were classified solely as *O. mykiss*. The classifications were determined by using a combination of the silhouette images, estimated lengths, and video clips. In addition, if larger adult sized *O. mykiss* were detected and a useful video clip was recorded, measurements of eye diameter and standard length (SL) were estimated from the video clip to calculate morphometric ratios that were compared to known steelhead and rainbow trout.

A commonly used morphological method to discriminate differences is using body measurements to develop ratios for comparisons, which removes the effects of body size (Strauss and Bond 1990). This is done by comparing SL to the ratio of eye diameter in linear regression. Standard length is measured length from tip of snout to

end of hypural plate near the end of the fleshy caudal peduncle, which is unaffected by caudal fin deformities (Anderson and Neumann 1996).

Before 2010, the adult steelhead classification was used if the fish observed was an *O. mykiss* and displayed the typical characteristics of an anadromous adult steelhead, such as black spotting on dorsal, adipose, and caudal fins, black spotting on dorsal side of body, silvery body, vertical edge to caudal fin,  $\geq 38$  cm TL (Shapovalov and Taft 1954), and eye diameter/SL ratio  $\leq 0.045$  (CMWD 2008). The new classification method may include juvenile resident, smolts, adult resident, and adult anadromous *O. mykiss* migrating throughout the basin. Conceivably, after more data are collected from the downstream trapping component, or from other Ventura River basin research projects, a more accurate classification system of Riverwatcher detections could be used again.

The “fish unknown” classification was used if a detection was identified to be a fish based on video evidence, but further classification could not be determined due to high turbidity, or inadequate portion of the fish captured within the camera’s field of view. The “fish probable” classification was used if no fish was observed in the video, but the silhouette was similar to that of a typical fish silhouette confirmed by past video evidence. Even with reasonably good video coverage, smaller fish are still able to pass through the Riverwatcher undetected by the video cameras. This occurs if fish swim very close, high, or low relative to the cameras. In addition, this can happen if a fish swims upstream through the scanners but stops before entering the video field of view. High turbidity can also obscure the video detection and identification of fish.

The “false detection” classification was used when no fish was observed in the video and the silhouette was not similar to that of a typical fish silhouette. Because false detections tended to occur frequently during higher discharges, when turbidity and debris are also high, it is likely that most false detections during these periods are caused by debris, high turbidity, and water turbulence. A second video camera is directed at the Riverwatcher scanner plates to help determine the cause of many of the

false detections. After reviewing selected time periods when many assumed false detections occurred, it was concluded that debris, air bubbles, and turbulence were indeed the source of the detections. During low-flow periods (< 10 cfs), 99.9% of the time the Riverwatcher was operational, surface water turbulence was likely the cause of most false detections. When turbidity exceeds about 100 NTUs, hundreds of false detections can occur per hour due to high concentration of suspended solids breaking the infrared beams of the scanner plates. When turbidity is less than about 100 NTUs, false detections from suspended solids are not as frequent, but poor water visibility does not always allow for video confirmation, depending on how close to the camera a fish swims during passage. Once turbidity falls below about 25-30 NTUs, turbidity does not limit the Riverwatcher to detect and confirm fish passing through the facility (Table 1). In spring 2016, the Riverwatcher was tested in an above-ground pool with wooden fish silhouettes at varying water turbidities. This was intended to simulate natural stream conditions to provide further resolution of the operational capabilities of the Riverwatcher (Lewis et al. 2016).

Table 1. Riverwatcher general operational status for ranges of water turbidity (NTUs).

Approximate Turbidity (NTUs)	Riverwatcher status
> 200	Not functional
100-200	Many false scanner detections, not fully functional
30-100	Scanner functional, but unable to confirm with video
< 30	Scanner functional, grid detectable for video confirmation

A standardization test for the Riverwatcher was developed using wooden silhouettes of typical sizes for smolt and adult steelhead. To confirm the Riverwatcher is functioning correctly, this test is conducted before each fish passage season. A more detailed description of this test can be found in Lewis et al. (2016).

## Results and Discussion

Prior to the start of the Fish Passage Season, the Riverwatcher communication system was upgraded to boost the signal strength between the fish counter and PC to prevent data loss during periods of communication failure. This upgrade seemingly corrected past issues because there were no failures during 2022. The Riverwatcher was operated from 29 December 2021 through 07 June 2022 and was installed and operational 98% of the time it could have operated during this period. It was removed from the fishway in June due to low water levels. The Riverwatcher was not operated for about 15 hours due to high turbidity. During the 2022 fish passage season, the crowder was removed from the fish bypass channel and cleaned or inspected approximately 62 times. Finally, the Riverwatcher was not operated for approximately 50 hours due to a failed PC internal power supply component that required troubleshooting and repair. A total of 2,808 false detections were recorded by the Riverwatcher, of which 826 were upstream and 1,982 were downstream. There were 6 non-*O. mykiss* detected passing upstream or downstream through the Riverwatcher; 5 Largemouth Bass and 1 sunfish (Appendix 10).

The 2,808 false detections recorded by the Riverwatcher were assumed to be caused from turbidity, debris, turbulence, air bubbles, and settings of the Riverwatcher to detect smaller fish. The review of the second DVR camera directed at the Riverwatcher scanner plates provides confidence that these are the likely cause of false detections. None of the detections produced silhouettes that appeared to be fish based on previous experience operating the Riverwatcher orientation (see Gibson 2012 for Riverwatcher silhouette detection examples). In the event that one of these silhouettes could have been caused by a fish, all detection video clips created by the Riverwatcher were reviewed and no fish were observed. Many of the false detections during 2022 were caused from the water surface elevation as flows receded and the Riverwatcher was not adjusted at the same rate. For the 2022 season, the minimum threshold height remained at 28 mm so large numbers of false detections could be eliminated while still attempting to detect steelhead smolts. Based on available data from the Ventura Basin,

a height of 28 mm was determined to be similar to some of the smallest steelhead smolts expected to emigrate downstream through the Robles Fish Facility. This height corresponds to 146 mm TL and 139 mm FL. The estimated fish detection rate from a Riverwatcher verification study indicated that up to 93% of smolt sized *O. mykiss* will not be detected by the Riverwatcher (Lewis et al. 2016). Additionally, it was concluded that larger-sized fish (i.e., height > 80 mm) appeared to be detected nearly 100% of the time. This height is equal to about 475 mm TL. Shapovalov and Taft's (1954) 9-year study documented only 4% of the total number of adult steelhead were smaller than 475 mm. Therefore, the number of small adult steelhead that may not be detected would likely be low and the vast majority of adult steelhead would be detected.

## 7.0 ADDITIONAL BIOLOGICAL AND ENVIRONMENTAL MONITORING STUDIES

### 7.1 *O. mykiss* Presence/Absence Surveys

#### Methods

In addition to the fish attraction monitoring, *O. mykiss* relative abundance index surveys were conducted in the Ventura River mainstem between the Robles Fish Facility and the Ventura River mouth, San Antonio Creek, and upstream of the Robles Fish Facility in Matilija and North Fork Matilija creeks. These additional sites were surveyed using both bank and snorkeling methods (depending on water conditions and expected life history stage) but were conducted primarily after storm events for adults and during the rest of the year for smolts, parr, and fry. Methods to estimate fish size and numbers were the same as those used in the fish attraction evaluation. A total of 14 sites were monitored and both pool and riffle habitat at each site were included (Appendix 11). These additional areas were surveyed to determine if adult steelhead were entering the Ventura River, migrating upstream, holding and spawning, and if they were successfully passing through the Robles Fish Facility. Also, juvenile *O. mykiss* (smolts and residents) were surveyed to learn spatial and temporal patterns.

The survey sites were initially selected based on ease of access, coverage of basin, and assumed chance of detecting *O. mykiss*. However, after all habitat surveys were completed, site selection was also based on quantitative measurements identifying high-quality habitats used for *O. mykiss* juvenile rearing and adult holding.

### Results

Peak snorkel counts within each year were generally between 350 and 400 *O. mykiss* until 2013. Due to the exceptional 5-year drought (2012-2016) and post Thomas Fire effects, the peak numbers of *O. mykiss* dropped substantially (Appendix 12). No *O. mykiss* were observed during the reporting period ending in June 2022. However, opportunistic snorkeling upstream of Matilija Dam in Murietta Canyon and Upper North Fork Matilija Creek revealed adult and young-of-the-year *O. mykiss* (both 2021 and 2022) indicating successful reproduction and early stages of population increase.

### 7.2 *O. mykiss* Index Spawning Surveys

#### Methods

Spawning surveys were conducted throughout the Ventura Basin accessible to anadromous steelhead or only to resident rainbow trout (i.e., upstream of Matilija Dam). A total of 21 index sites or reaches were subjectively selected (Appendix 13) with small to medium size gravel that are suitable for steelhead spawning (Shapovalov and Taft 1954; Orcutt et al. 1968). During 2008, the spawning index sites selected were initially distributed broadly within the basin to capture general spawning locations and timing. Since 2008, longer reaches have been added to incorporate and replace previously surveyed discrete sites to accommodate for spawning gravel redistribution after storm events. Additional sites have been added to capture quality spawning habitat and to be more representative of each surveyed sub-basin. This initial information will be used to establish long-term index sites to capture population trends. The spawning surveys were conducted biweekly from January through June. Once spawning was observed,

surveys were continued until at least 2 surveys were completed with no new redds could be detected. Observations were made at spawning sites to identify and count *O. mykiss* redds; redds were identified by typical characteristics (Orcutt et al. 1968; Chapman 1988). Once a redd was identified, physical measurements similar to those recorded by Zimmerman and Reeves (2000) were collected to characterize the redd. The physical measurements were only recorded during the first three years because it was felt sufficient data was collected to characterize redds. Currently, larger redds (likely anadromous) have all measurements collected. Pit and tailspill lengths were measured from the upstream end to the downstream end of each, respectively. Redd width was measured at the widest point of the tailspill (Appendix 14). Water depth was measured at four locations: in the pit, adjacent to the pit, upstream of the pit, and at the tailspill. The surface median ( $D_{50}$ ) and maximum substrate size of each redd tailspill was estimated. All adjacent measurements were taken on the thalweg side of each redd. Photos and GPS locations were also recorded for all redds identified. This information will help determine steelhead spawning habitat selection characteristics.

### Results

Spawning surveys started in 2008, numbers initially increased from only 3 redds to a high of 165 redds in 2012. Since the peak in 2012, as the current drought intensified or was sustained, the available habitat diminished, and there has been a corresponding decrease of adult and juvenile *O. mykiss* populations with significantly lower redd counts. In 2022, one large redd was observed on 30 March (first observed previous week by CDFW) near the Ojai Valley Sanitary District water treatment plant (~ 8 rkm) in index site #2 (Appendix 15). The redd was large (143 cm long and 39 cm wide) and likely represented a steelhead spawning effort. Snorkeling was conducted downstream (60 m) and upstream (10 m) of the redd site by 2 snorkelers (one on each bank) after expected fry emergence (40 and 85 days from first observation) and no fry were observed.

### *7.3 Ambient Water Quality Monitoring*

To evaluate aspects of the monitoring and evaluation program, water quality data is collected throughout the Ventura River basin (Appendix 16). Water temperatures are recorded at 12 locations throughout the Ventura River basin. The locations include the Ventura River estuary and mainstem, Coyote Creek, San Antonio Creek, North Fork Matilija Creek, and Matilija Creek upstream and downstream of Matilija Dam. The temperature loggers recorded at 30-min intervals. Monthly grab samples are also collected at the same locations with a multiprobe that measures: dissolved oxygen, pH, conductivity, salinity, TDS, and temperature. A monthly water quality profile is also collected in the estuary/lagoon. The profiles are collected at approximately the mid-point of the estuary/lagoon and at least four depths are recorded. A continuous turbidity probe is also installed in the Robles Fish Facility near the Riverwatcher. It records water turbidity at 1-hr intervals when the bypass is operational. The probe was ungraded at the start of the 2022 Fish Passage Season and now has a measurement range of 0-4000 NTU; a four-fold increase from the previous probe. Turbidity measurements are also collected at several sites upstream, downstream, and within the Robles Fish Facility. All locations were monitored if sufficient water was present. A weather station at the Robles Fish Facility collects various atmospheric data including: rainfall, temperature, pressure, wind, humidity, and dew point (Appendix 17).

### *7.4 Estuary/Lagoon Monitoring*

The sandbar is monitored during the fish passage season to determine if it is open. If open, Robles Fish Facility operating criteria must be met per the BO. Outside of the passage season, monitoring has been conducted and expanded to better understand the nature of the Ventura River sandbar and how it may affect fish passage year-round and potential estuary/lagoon rearing capacity. The estuary/lagoon has been monitored monthly for water depth as part of the water quality monitoring. In addition, the surface area has been measured every 6 months. However, the spring 2020 survey was not

conducted because of COVID-19 protocol issues with having two people in one kayak. Together, these physical measurements can provide some general index of rearing capacity of the Ventura River estuary/lagoon over time. From 2008 through 2011, which were wetter years, the estuary/lagoon depth and size varied. However, since the beginning of the drought in 2012, estuary/lagoon depth and surface area have remained somewhat uniform (Appendix 18).

### *7.5 Surface Flow Monitoring*

The Ventura River, like most rivers in southern California, have significant reaches that lose surface flow during most years after storm flows recede. To quantify this natural pattern, surface flows have been observed and documented since the end of 2007. Like the sandbar monitoring, clear patterns have become apparent. During normal and wet precipitation years, there are typically surface flows throughout the length of the Ventura River mainstem during the fish passage season lasting 9 to 29 weeks. However, even during these years, the Robles Reach can go dry shortly after storms occur. Beginning with the drought in 2012, the Robles Reach was dry for extensive periods of time, even extending downstream of the reach to below the San Antonio Creek confluence. This drought-induced pattern significantly contracted, both spatially and temporally, due to increased precipitation and runoff during the 2017 monitoring period. During 2020, precipitation was about 88% of average and surface flow continued for a longer period and farther downstream than typical (Appendix 19). These longer base flows may be related to Thomas Fire effects that modified the watershed hydrologic cycle. In addition, the much higher than average flows of 2019 probably contributed to the observed increased base flows. Below average precipitation during 2021 produced little runoff and insignificant surface flow in the Robles Reach; only one brief surface connection occurred ( $\approx 6$  h) following a rain event on 28 January 2021 (Appendix 19). During 2022, the pattern was similar to 2021 with increased spatial and temporal occurrences proportional to the increased precipitation.

## 7.6 Photographic Index Sites

Photographic index sites were established throughout the Ventura River basin in 2007 to monitor general changes of the stream channel morphology, water conditions, and riparian zones. There are a total of 14 sites where an upstream and downstream photo are taken (Appendix 21). The sites were re-visited twice during the reporting period, in September 2021 and March 2022. As a representation of the general patterns within the mainstem of the Ventura River, Appendix 21 shows the general trend that has been observed of increasing riparian and within channel vegetation over time since 2015.

## 7.7 Underwater Video Monitoring

As time allowed, a pilot study of an underwater video monitoring system was continued to determine if remote monitoring for adults or smolts is feasible within the Ventura River or tributaries. The monitoring system was placed at selected locations when water conditions were suitable to record fish rearing, holding, or migrating. The system consisted of an underwater video camera attached to a DVR that can record for 6-8 hours at a time. The system was powered by a 12-volt DC battery so the system could be placed anywhere within the basin. The video recordings were reviewed to determine presence or absence and relative numbers of *O. mykiss*. If this pilot study is successful, it may be expanded and developed into a more quantitative monitoring tool. This system was also used at the fish ladder entrance during post-storm observations. Underwater video monitoring was not conducted during the 2022 fish passage season.

## 7.8 Stranding Surveys

Stranding surveys were conducted during the reporting period as part of other monitoring and evaluations (i.e., impediment, snorkel, and spawning surveys). No stranded *O. mykiss* were observed.

## 8.0 LITERATURE CITED AND BIBLIOGRAPHY

- Adams, N. S., D. W. Rondorf, S. D. Evans, and J. E. Kelly. 1998. Effects of surgically and gastrically implanted radio transmitters on growth and feeding behavior of juvenile Chinook salmon. *Transaction of the American Fisheries Society*, 127:128-136.
- Anderson, R. O., and R. M. Neumann. 1996. Length, weight, and associated structural indices. Pages 477-482 in B. R. Murphy and D. W. Willis, editors. *Fisheries techniques*, 2nd edition. American Fisheries Society, Bethesda, Maryland.
- Ando, D., T. Kitamura, and S. Mizuno. 2005. Quantitative analysis of body silvering during smoltification in masu salmon using chromameter. *North American Journal of Aquaculture*, 67:160-166.
- Banks, J. W. 1969. A review of the literature on the upstream migration of adult salmonids. *Journal of Fish Biology*, 1:85-136.
- Beeman, J. W., and A. G. Maule. 2001. Residence time and diel passage distribution of radio-tagged juvenile spring Chinook salmon and steelhead in a gatewell and fish collection channel of a Columbia River dam. *North American Journal of Fisheries Management*, 21:455-463.
- Beeman, J. W., D. W. Rondorf, M. E. Tilson, and D. A. Venditti. 1995. A nonlethal measure of smolt status of juvenile steelhead based on body morphology. *Transactions of the American Fisheries Society* 124:764-769.
- Behnke, R. J. 1992. Native trout of western North America. *American Fisheries Society Monograph* 6.
- Bond, M. H., A. A. Hayes, G. V. Hanson, and R. B. MacFarlane. 2008. Marine survival of steelhead (*Oncorhynchus mykiss*) enhanced by a seasonally closed estuary. *Canadian Journal of Fisheries and Aquatic Sciences*, 65: 2242-2252.
- Bratovich, P. M., and D. W. Kelley. 1988. Investigation of salmon and steelhead in Lagunitas Creek, Marin County, California. Volume 1. Migration, spawning, embryo incubation and emergence, juvenile rearing, emigration. Marin Municipal Water District. Corte Madera, California.
- Brown, R. S., S. J. Cooke, W. G. Anderson, and R. S. McKinley. 1999. Evidence to challenge the "2% rule" for biotelemetry. *North American Journal of Fisheries Management*, 19:867-871.

- Busby, P. B., T. C. Wainwright, G. J. Bryant, L. J. Lierheimer, R. S. Waples, F. W. Waknitz, and Lagomarsino. 1996. Status review of west coast steelhead from Washington, Idaho, Oregon, and California. National Marine Fisheries Service. NOAA technical memorandum NMFS-NWFSC-27, August 1996.
- Cannata, S. T. 1998. Observations of steelhead trout (*Oncorhynchus mykiss*), coho salmon (*O. kisutch*) and water quality of the Navarro River estuary/lagoon, May 1996 to December 1997. Draft report, Humboldt State University Foundation. Humboldt, CA.
- Chapman, D. W. 1988. Critical review of variables used to define effects of fines in redds of large salmonids. Transactions of the American Fisheries Society 117(1):1-21.
- Chrisp, E. Y., and T. C. Bjornn. 1978. Parr-smolt transformations and seaward migration of wild and hatchery steelhead trout in Idaho. Idaho Cooperative Fishery Research Unit, University of Idaho, Moscow, Idaho. Final project report F-49-R.
- Clay, H. C. 1995. Design of fishways and other fish facilities, 2<sup>nd</sup> edition. CRC Press, Inc., Boca Raton, FL.
- Cooke, R. U., A. Warren, and A. S. Goudie. 1992. Desert geomorphology. UCL Press, London.
- CMWD. 2005. 2005 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2006. 2006 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2007. 2007 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2008. 2008 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2009. 2009 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2010. 2010 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.
- CMWD. 2011. 2011 progress report for the Robles Diversion Fish Passage Facility. Casitas Municipal Water District, Oak View, CA.


- CMWD, Wood Rogers, and ENTRIX Inc. 2002. Preliminary draft technical memorandum of operation constraint assessment of the Robles Fish Passage Facility. Prepared for US Bureau of Reclamation.
- Dauble, D. D., T. L. Page, and W. Hanf. 1989. Spatial distribution of juvenile salmonids in the Hanford Reach, Columbia River. *Fishery Bulletin*, 87:775-790.
- Dettman, D. H., and D. W. Kelley. 1986. Assessment of the Carmel River steelhead resource, Volume 1. biological investigations. Monterey Peninsula Water Management District, Monterey, CA.
- ENTRIX. 1999. Evaluations of natural passage barriers on the Ventura River downstream of Robles Diversion. ENTRIX, Walnut Creek, CA.
- ENTRIX. 2000. Results of fish passage monitoring at the Vern Freeman diversion facility Santa Clara River, 1994-1998. ENTRIX, Walnut Creek, CA.
- Flosi, G., S. Downie, J. Hopelain, M. Bird, R. Coey, and B. Collins. 2002. California salmonid stream habitat restoration manual, Volume I, 3rd edition. California Department of Fish and Game. Inland Fisheries Division, Sacramento, CA.
- Gibson, M. 2012. Selected data from Vaki Riverwatcher operated in the Robles Fish Passage Facility from 2010-2011 with additional examples from previous years data. Prepared for the Robles BC, Casitas Municipal Water District, Oak View, California.
- Hagar, J. 1996. Salinas River steelhead status and migration flow requirements. Monterey County Water Resources Agency. Salinas, California.
- Haner, P. V., J. C. Faler, R. M. Schrock, D. W. Rondorf, and A. G. Maule. 1995. Skin reflectance as a nonlethal measure of smoltification for juvenile salmonids. *North American Journal of Fisheries Management*, 15:814-822.
- Hockersmith, E. E., W. D. Muir, S. G. Smith, B. P. Sandford, N. S. Adams, J. M. Plumb, R. W. Perry, and D. W. Rondorf. 2000. Comparative performance of sham radio-tagged and PIT-tagged juvenile salmon. US Army Corps of Engineers, Walla Walla District.
- Harrison, L. R., E. A. Keller, E. Kelley, and L. A. K. Mertes. 2006. Minimum flow requirements for southern steelhead passage on the lower Santa Clara River, CA. University of California, Santa Barbara.
- Hasler, A. D., and A. T. Scholz. 1983. Olfactory imprinting and homing in salmon. Springer-Verlag, New York.

- Jepsen, N., L. E. Davis, C. B. Schreck, and B. Siddens. 2001. The physiological response of Chinook salmon smolts to two methods of radio-tagging. *Transactions of the American Fisheries Society* 130:495-500.
- Leopold, L. B., M. G. Wolman, and J. P. Miller. 1992. *Fluvial processes in geomorphology*. W. H. Freeman and Company, San Francisco.
- Lewis, S. D. 2001. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2000. Portland General Electric. Portland, Oregon.
- Lewis, S. D. 2002. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2001. Portland General Electric. Portland, Oregon.
- Lewis, S. D. 2003. Movements of hatchery steelhead smolts in Lake Billy Chinook and Squaw Creek during 2002. Portland General Electric. Portland, Oregon.
- Lewis, S. D., M. W. Gibson, J. L. Switzer, and A. L. Bonsignori. 2016. DRAFT—Verification testing of the Robles Fish Facility Vaki Riverwatcher. Casitas Municipal Water District, Oak View, California.
- Lewis, S. D., M. W. Gibson, and J. L. Switzer. 2015. 2016 monitoring and evaluation study plan for the Robles Fish Passage Facility and related studies. Casitas Municipal Water District, Oak View, California.
- Lewis, S. D., and M. W. Gibson. 2022. 2022 monitoring and evaluation study plan for the Robles Fish Passage Facility and related studies. Casitas Municipal Water District, Oak View, California.
- Matthews, K. R., and N. H. Berg. 1997. Rainbow trout responses to water temperature and dissolved oxygen stress in two southern California stream pools. *Journal of Fish Biology*, 50:50-67.
- Matthews, K. R., N. H. Berg, D. L. Azuma, and T. R. Lambert. 1994. Cool water formation and trout habitat use in a deep pool in the Sierra Nevada, California. *Transactions of the American Fisheries Society*, 123:549-564.
- Moore, K., K. Jones, and J. Dambacher. 2002. *Methods for stream habitat surveys, Version 12.1*. Oregon Department of Fish and Wildlife, Aquatic Inventories Project, Natural Production Program, Corvallis, OR.
- Mosley, M. P. 1982. Critical depths for passage in braided river, Canterbury, New Zealand. *New Zealand Journal of Marine and Freshwater Research*, Vol. 16:351-357.

- National Marine Fisheries Service. 1997. Endangered and Threatened Species: Listing of Several Evolutionary Significant Units (ESUs) of West Coast Steelhead. Federal Register, 50 CFR Parts 222 and 227 [Docket No. 960730210-7193-02; I.D. 050294D] RIN 0648-XX65. Vol. 62, page 43937.
- National Marine Fisheries Service. 2003a. Biological opinion for the Robles diversion fish passage facility, Ventura River, CA. Protected Resource Division, Southwest Region, March 31, 2003.
- National Marine Fisheries Service. 2003b. Endangered and Threatened Species: Range Extension for Endangered Steelhead in Southern California. Federal Register, 50 CFR Part 224 [Docket No. 001025296-2079-02; I.D. 072600A] RIN 0648-AO05. Vol. 67 page 21586.
- National Marine Fisheries Service. 2005. Endangered and Threatened Species: Request for Comment on Alternative Approach to Delineating 10 Evolutionarily Significant Units of West Coast *Oncorhynchus mykiss*. 50 CFR Parts 223 and 224 [Docket No. 040525161-5274-05; I.D. No. 052104F] RIN No. 0648-AR93. Vol. 70 page 67130.
- National Marine Fisheries Service. 2009. Letter addressed to Scott Lewis (Casitas Municipal Water District) addressing the downstream fish passage evaluation. Letter dated 28 April 2009, SWR/2002/1871:SCG.
- Orcutt, D. R., B. R. Pulliam, and A. Arp. 1968. Characteristics of steelhead trout redds in Idaho streams. Bureau of Commercial Fisheries, Boise, Idaho.
- Odeh, M. 2000. Advances in fish passage technology: engineering design and biological evaluation. American Fisheries Society, Bethesda, Maryland.
- Quinn, T, H. 2005. The behavior and ecology of pacific salmon and trout. American Fisheries Society, Bethesda, Maryland.
- Scott, W. B. and E. J. Crossman. 1973. Freshwater fishes of Canada. Fisheries Research Board of Canada, Ottawa, Bulletin 184.
- Shapovalov, L. and A. C. Taft. 1954. The life histories of the steelhead rainbow trout (*Salmo gairdneri gairdneri*) and silver salmon (*Oncorhynchus kisutch*), with special reference to Waddell Creek, California, and recommendations regarding their management. State of California Department of Fish and Game, fish bulletin No. 98.
- Spina, A. P., M. A. Allen, and M. Clarke. 2005. Downstream migration, rearing abundance, and pool habitat associations of juvenile steelhead in the lower main stem of a south-central California stream. North American Journal of Fisheries Management, 25:919-930.

- Stoecker, M. 2010. North Fork Matilija Creek adult steelhead below Ojai Quarry barriers. Letter sent on 30 March 2010 about adult steelhead observations, 5 p.
- Strauss, R. E., and C. E. Bond. 1990. Taxonomic methods: In Schreck C. B. and P. B. Moyle, editors. Methods for fish biology. AFS, Bethesda, Maryland.
- Summerfelt, R. C., and L. S. Smith. 1990. Anesthesia, surgery, and related techniques. Pages 213-272 in C. B. Schreck and P. B. Moyle, editors. Methods for Fish Biology. American Fisheries Society, Bethesda, Maryland.
- SYRTAC (Santa Ynez River Technical Advisory Committee). 1999. Adult steelhead passage flow analysis for the Santa Ynez River. Santa Ynez River Consensus Committee, Santa Barbara, CA.
- SYRTAC (Santa Ynez River Technical Advisory Committee). 2000. Lower Santa Ynez River fish management plan. Santa Ynez River Consensus Committee, Santa Barbara, CA.
- Tan, S. S., and T. A. Jones. 2006. Geologic map of the Matilija 7.5' quadrangle Ventura County, California: a digital database. Version 1.0, Los Angeles, CA.
- Thompson, K. 1972. Determining stream flows for fish life. Pacific Northwest River Basins Commission, instream flow requirements workshop. Portland, Oregon. Proceedings: 31-50.
- U.S. Bureau of Reclamation. 2003. Revised biological assessment for diversion operations and fish passage facilities at the Robles Diversion, Ventura River, CA. South-Central California Area Office, February 21, 2003.
- U.S. Bureau of Reclamation. 2018. Robles Biological Committee report on proposed recommended Critical Drought Protection Measures for conservation of Lake Casitas storage. South-Central California Area Office, December 18, 2003.
- Vaki. 2003. User manual for Riverwatcher. Vaki Aquaculture Systems Ltd., Iceland.
- Wagner, H. H., R. L. Wallace, and H. J. Campbell. 1963. The seaward migration and return of hatchery-reared steelhead trout, *Salmo gairdneri* Richardson, in the Alsea River, Oregon. Transactions of the American Fisheries Society, 92(3):202-210.
- Zimmerman, C. E., and G. H. Reeves. 2000. Population structure of sympatric anadromous and nonanadromous *Oncorhynchus mykiss*: evidence from spawning survey and otolith microchemistry. Canadian Journal of Fisheries and Aquatic Sciences, 57:2152-2162.

## 9.0 APPENDICES

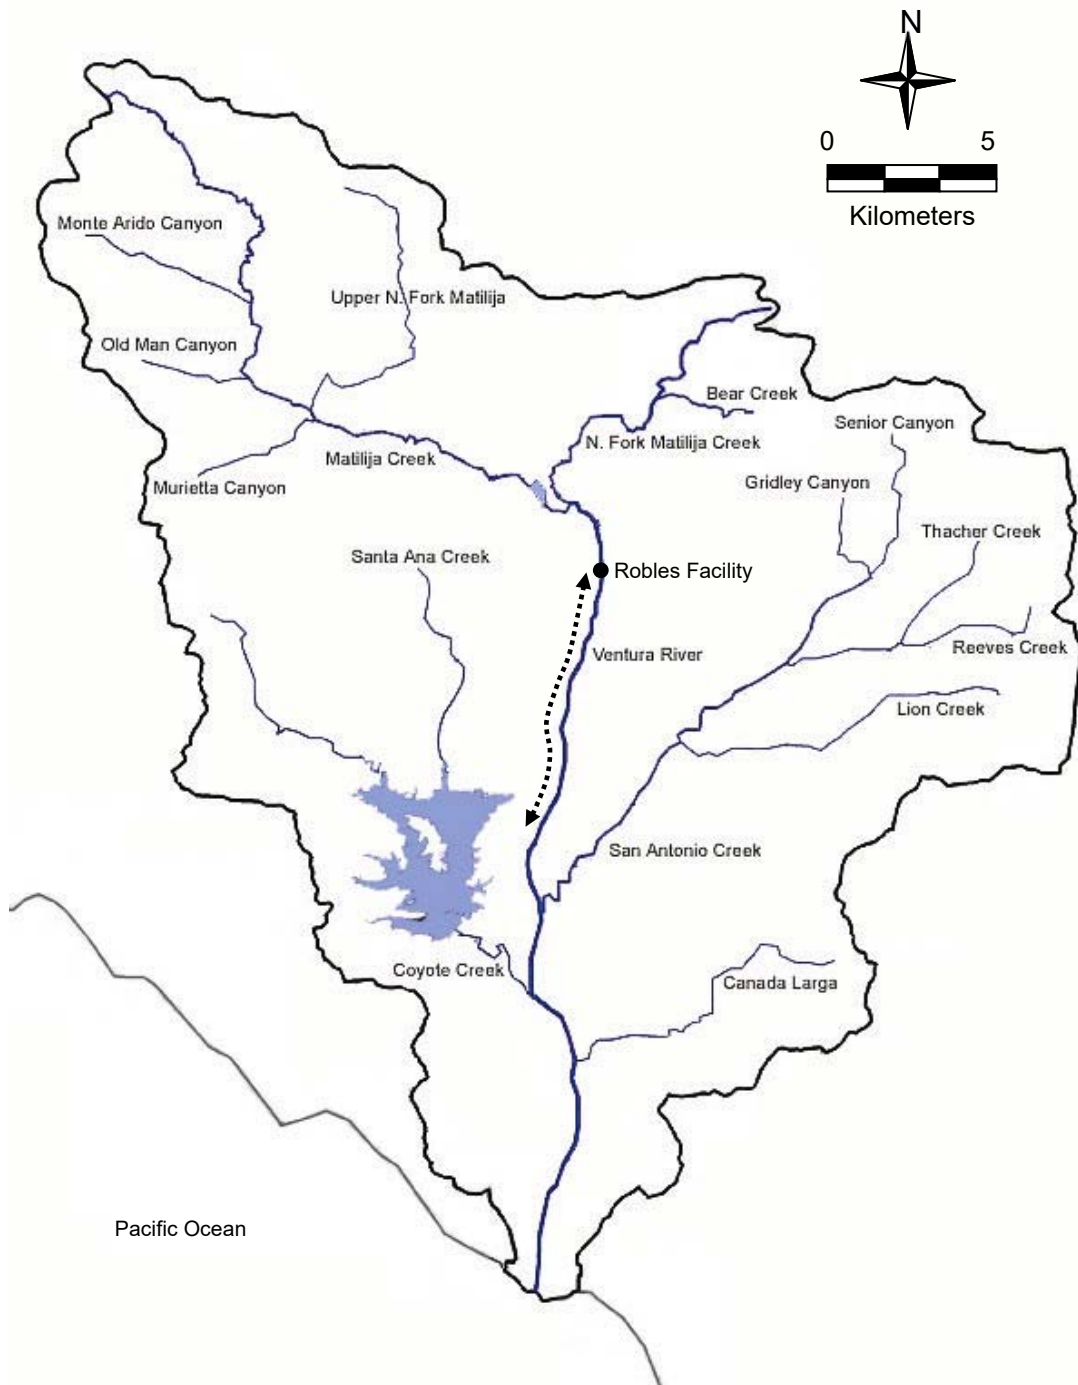

Appendix 1. Basin map of the Ventura River. The Robles Fish Passage Facility is identified by the black dot and the Robles Reach is identified by the dashed line downstream of the Robles Facility.

Appendix 2. Summary data of current impediment sites for upstream fish migration impediment evaluations.

Site No.	Latitude (N)	Longitude (W)	km	Habitat Type <sup>a</sup>	Site Description	Length (m)	Slope (%)	Percent Substrate <sup>b</sup>						Active Channel Width (m)
								SO	SD	GR	CB	BD	BR	
10-2	34.365265°	119.311082°	11	RI	Near Casitas Springs at bottom of levy	38.2	1.0	0	0	10	70	20	0	44.5
3-2	34.373789°	119.308417°	12	RB	Near Casitas Springs at top of levy	22.0	3.7	10	5	10	65	10	0	27.0
4 <sup>c</sup>	34.384743°	119.310030°	14	RI	0.5 km upstream of San Antonio Cr. confluence	23.8	5.0	0	0	0	15	85	0	27.9
5-2	34.396095°	119.309537°	15	RI	0.4 km downstream of Santa Ana Blvd. bridge	8.4	7.0	0	5	5	45	45	0	50.6
6-5 <sup>c</sup>	34.411318°	119.301491°	17	CB	1.4 km upstream of Santa Ana Blvd. bridge	26.1	5.0	0	0	0	65	35	0	33.8
9	34.426708°	119.301831°	19	RI	0.2 km upstream of Hwy 150 bridge	67.9	1.5	0	0	0	30	70	0	32.4
7	34.438184°	119.299528°	20	RB	1.1 km upstream of Hwy 150 bridge	31.6	2.0	5	0	10	40	45	0	65.9

<sup>a</sup>The habitat types are: RB = rapid with protruding boulders, RI = riffle, and CB = cascade over boulders.

<sup>b</sup>The substrate types are: SO = silt and organics, SD = sand, GR = gravel, CB = cobble, BD = boulders, and BR = bedrock.

<sup>c</sup>Site was substantially alter by high flows and sediment during 2017 (4) or 2019 (6-5) and is no longer monitored.

Appendix 3. Completed transects through 2022 at impediment sites for target downstream discharge releases from the Robles Fish Facility.

Robles Discharge (cfs)	Impediment Sites								
	3-2	4	5-2	6-2 6-3	6-4 6-5	7	9	10	10-2
171	x		x	x, x			x	x	
100	x	x	x			x	x	x	x
82	x, x	x	x		x	x, x	x, x	x	x
74	x	x	x, x	x, x	x	x	x		x
68	x		x		x	x	x		x
62	x	x, x, x, x	x	x		x	x	x	x
56	x		x	x	x	x	x	dry	x
50	x	x	x	x, x	x	x, x	x	x, x	x
40	x	x, x, x	x, x	x	x	x, x, x	x, x, x	x	x
30	x	x, x	x, x	x	x, x	x, x, x	x, x, x	x, x	x
20	x	x	x		x	x	x		x


Completed transects rounded to nearest Robles discharge (e.g., the four transects measured for Site 4 at 62 cfs ranged from 61-63 cfs) based on mean 2.6 rkm/h lag time and averaging hourly discharge of released water from Robles. Colors correspond to year of survey: x = 2010, x = 2011, x = 2014, x = 2017, x = 2018, and x = 2019. Sites 4, 6-2 through 6-5, and 10 (gray columns) were alter by storm flows over time and data are no longer collected.

Appendix 4. Ventura River sandbar monitoring data from July 2021 through June 2022.

Date	Sandbar Breached (Y/N)	Time (24h)	Tide Height (ft)	Tidal State	High Tide		Low Tide		Mean Daily Discharge at Foster <sup>a</sup> (cfs)	Mean Daily Discharge at Robles (cfs)	Notes
					Time (24h)	Height (ft)	Time (24h)	Height (ft)			
07/01/2021	Y	10:22	0.9	slack	16:51	4.5	9:54	0.8	1.2	0.0	Open, east bank
07/09/2021	N	14:40	2.6	ebb	11:03	3.6	15:22	2.5	1.1	0.0	Closed
07/14/2021	N	13:33	4.0	flood	14:08	4.0	7:24	-0.1	1.5	0.0	Closed
08/30/2021	Y	11:27	3.4	flood	15:58	4.5	8:01	3.1	1.2	0.0	Open, east bank
09/10/2021	N	15:11	3.5	ebb	12:12	5.5	18:54	0.8	1.1	0.0	Closed
11/23/2021	N	15:30	1.7	ebb	10:17	5.3	18:22	0.3	0.4	0.0	Closed
01/04/2022	Y	9:30	6.7	slack	9:46	6.7	3:38	2.1	10.9	20.0	Open, east bank
01/26/2022	Y	14:35	1.8	flood	17:33	2.7	11:23	0.6	8.7	15.0	Open, east bank
02/10/2022	Y	15:22	1.3	flood	19:57	3.1	12:52	0.3	8.2	9.0	Open, east bank
02/25/2022	Y	13:10	1.0	flood	19:12	3.2	12:16	-0.5	7.6	10.0	Open, east bank
03/11/2022	Y	14:12	0.9	flood	19:45	3.2	12:17	0.4	7.5	4.0	Open, east bank
03/25/2022	Y	8:30	1.5	ebb	3:21	4.8	11:48	-0.2	6.9	3.0	Open, east bank
04/07/2022	Y	14:02	2.0	flood	1:42 <sup>b</sup>	4.0	9:25	0.8	7.3	4.0	Open, east bank
04/27/2022	Y	13:00	0.5	ebb	8:03	4.6	14:21	0.0	6.8	7.6	Open, east bank
05/19/2022	Y	9:30	0.0	flood	14:07	3.4	7:15	-1.2	6.0	1.0	Open, east bank
05/31/2022	Y	14:30	2.9	ebb	11:47	3.3	15:59	2.4	5.8	1.0	Open, east bank
06/10/2022	Y	12:00	1.4	ebb	7:05	3.5	12:36	1.3	5.2	0.0	Open, east bank
06/23/2022	Y	11:30	1.6	ebb	6:58	3.3	12:12	1.5	4.7	0.0	Open, east bank

<sup>a</sup>USGS gauging station number 11118500; downstream of Foster Park.

<sup>b</sup>Tide occurs on following day.

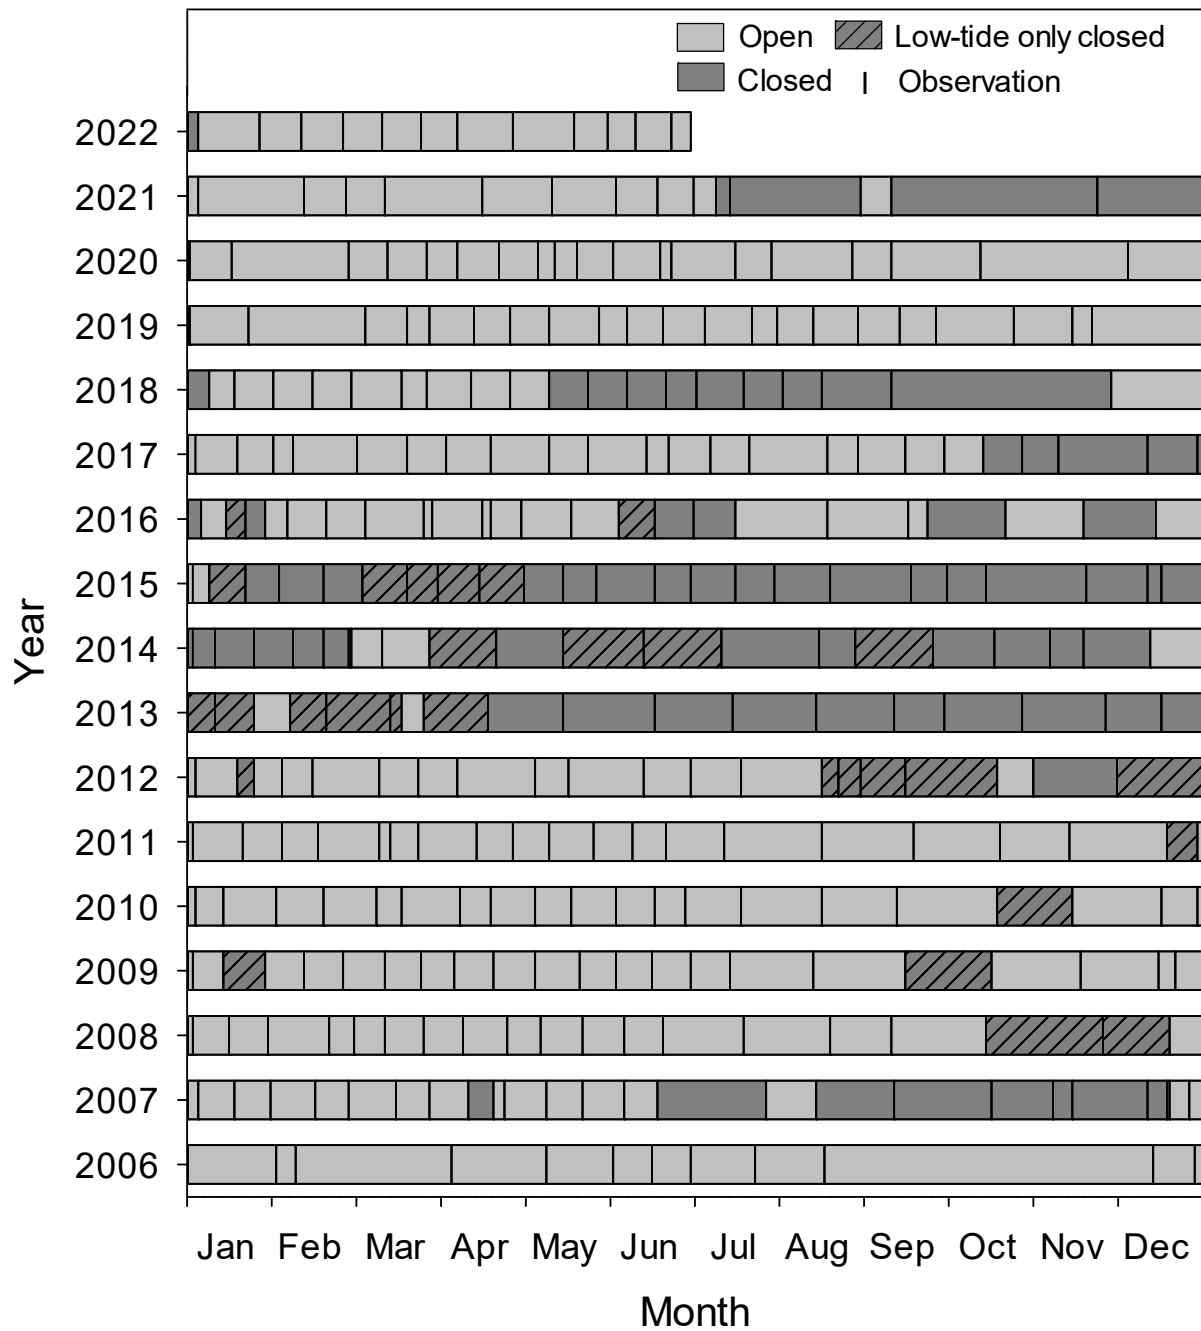

Appendix 5. Sandbar status at the mouth of the Ventura River from 2006 through June of 2022. Each observation is indicated by a vertical line and the sandbar status was assumed to remain unchanged until the next observation.

Appendix 6. Weekly fish attraction counts at the Robles Fish Facility during 2022.

Date	Method	Direction	Length (m)	Temp (°C)	Turbidity (NTU)	Robles	Species <sup>b</sup>	Count
						Discharge (cfs) <sup>a</sup>		
01/07/2022	BANK	Downstream	200	12.8	15.0	20.0	NFO	0
01/07/2022	BANK	Upstream	140	12.8	15.0	20.0	NFO	0
01/10/2022	BANK	Downstream	200	12.3	14.4	20.0	NFO	0
01/10/2022	BANK	Upstream	140	12.3	14.4	20.0	NFO	0
01/20/2022	SNORKEL	Downstream	200	12.5	2.7	18.0	NFO	0
01/20/2022	SNORKEL	Upstream	140	12.5	2.7	18.0	NFO	0
01/24/2022	BANK	Downstream	200	10.0	8.0	15.0	NFO	0
01/24/2022	BANK	Upstream	140	10.0	8.0	15.0	NFO	0
01/31/2022	BANK	Downstream	200	10.0	5.9	14.0	NFO	0
01/31/2022	BANK	Upstream	140	10.0	5.9	14.0	NFO	0
02/07/2022	BANK	Downstream	200	10.5	8.1	11.0	NFO	0
02/07/2022	BANK	Upstream	140	10.5	8.1	11.0	NFO	0
02/18/2022	BANK	Downstream	200	14.4	3.9	10.0	NFO	0
02/18/2022	BANK	Upstream	140	14.4	3.9	10.0	NFO	0
02/23/2022	SNORKEL	Downstream	200	10.0	3.6	9.0	NFO	0
02/23/2022	SNORKEL	Upstream	140	10.0	3.6	9.0	NFO	0
02/28/2022	BANK	Downstream	200	15.1	1.5	9.0	NFO	0
02/28/2022	BANK	Upstream	140	15.1	1.5	9.0	NFO	0
03/07/2022	BANK	Downstream	200	12.7	1.3	6.0	NFO	0
03/07/2022	BANK	Upstream	140	12.7	1.3	6.0	NFO	0
03/14/2022	BANK	Downstream	200	11.5	0.1	4.0	NFO	0
03/14/2022	BANK	Upstream	140	11.5	0.1	4.0	NFO	0
03/23/2022	SNORKEL	Downstream	200	20.0	4.2	2.0	NFO	0
03/23/2022	SNORKEL	Upstream	140	20.0	4.2	2.0	NFO	0
04/01/2022	BANK	Downstream	200	19.1	0.4	6.0	NFO	0
04/01/2022	BANK	Upstream	140	19.1	0.4	6.0	NFO	0
04/11/2022	BANK	Downstream	200	18.6	6.5	3.0	NFO	0
04/11/2022	BANK	Upstream	140	18.6	6.5	3.0	NFO	0
04/18/2022	BANK	Downstream	200	19.7	0.8	3.0	NFO	0
04/18/2022	BANK	Upstream	140	19.7	0.8	3.0	NFO	0
04/30/2022	SNORKEL	Downstream	200	18.0	2.7	2.0	NFO	0
04/30/2022	SNORKEL	Upstream	140	18.0	2.7	2.0	NFO	0
05/02/2022	BANK	Downstream	200	24.4	2.4	2.0	NFO	0
05/02/2022	BANK	Upstream	140	24.4	2.4	2.0	NFO	0
05/11/2022	BANK	Downstream	200	20.6	3.6	2.0	NFO	0
05/11/2022	BANK	Upstream	140	20.6	3.6	2.0	NFO	0
05/18/2022	BANK	Downstream	200	21.7	3.4	1.0	NFO	0
05/18/2022	BANK	Upstream	140	21.7	3.4	1.0	NFO	0
05/24/2022	SNORKEL	Downstream	200	23.5	2.0	1.0	NFO	0
05/24/2022	SNORKEL	Upstream	140	23.5	2.0	1.0	NFO	0
05/31/2022	BANK	Downstream	200	23.3	2.1	1.0	NFO	0
05/31/2022	BANK	Upstream	140	23.3	2.1	1.0	NFO	0
06/06/2022	SNORKEL	Downstream	200	18.0	1.9	0.0	NFO	0
06/06/2022	SNORKEL	Upstream	140	18.0	1.9	0.0	NFO	0
06/13/2022	BANK	Downstream	40	NA	6.4	0.0	NFO	0
06/13/2022	BANK	Upstream	140	NA	6.4	0.0	NFO	0
		Upstream	3,220 m			Upstream		0
		Downstream	4,440 m			Downstream		0
		Total	7,660 m			Total		0

<sup>a</sup>Daily mean discharge recorded by instrumentation at the Robles Fish Passage Facility (Appendix 7).

<sup>b</sup>OMY = *O. mykiss* and NFO = no fish observed.

Appendix 7. Monthly flow summary for Robles Fish Facility, reporting year 2021-2022.

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
Jul-21	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	1	0.6	2	20	0	0	0	0	0
2	1	0.6	2	20	0	0	0	0	0
3	0.9	0.6	1	20	0	0	0	0	0
4	0.8	0.6	1	20	0	0	0	0	0
5	0.9	0.6	1	20	0	0	0	0	0
6	0.9	0.6	1	20	0	0	0	0	0
7	0.9	0.6	1	20	0	0	0	0	0
8	0.8	0.6	1	20	0	0	0	0	0
9	0.8	0.6	1	20	0	0	0	0	0
10	0.8	0.5	1	20	0	0	0	0	0
11	0.7	0.5	1	20	0	0	0	0	0
12	0.7	0.5	1	20	0	0	0	0	0
13	0.8	0.5	1	20	0	0	0	0	0
14	0.9	0.5	1	20	0	0	0	0	0
15	0.9	0.5	1	20	0	0	0	0	0
16	0.9	0.5	1	20	0	0	0	0	0
17	0.8	0.5	1	20	0	0	0	0	0
18	0.8	0.5	1	20	0	0	0	0	0
19	0.8	0.5	1	20	0	0	0	0	0
20	0.7	0.5	1	20	0	0	0	0	0
21	0.8	0.5	1	20	0	0	0	0	0
22	0.6	0.4	1	20	0	0	0	0	0
23	0.6	0.4	1	20	0	0	0	0	0
24	0.6	0.4	1	20	0	0	0	0	0
25	0.6	0.4	1	20	0	0	0	0	0
26	0.7	0.5	1	20	0	0	0	0	0
27	0.6	0.5	1	20	0	0	0	0	0
28	0.5	0.4	0.9	20	0	0	0	0	0
29	0.5	0.4	0.9	20	0	0	0	0	0
30	0.4	0.4	0.8	20	0	0	0	0	0
31	0.4	0.4	0.8	20	0	0	0	0	0
Totals	23	16	39	620	0	0	0	0	0

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). **Discharge Estimated**

M=Missing TBD=To be determined

Aug-21	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck. (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	0.3	0.4	0.8	20	0	0	0	0	0
2	3	0.4	4	20	0	0	0	0	0
3	7	0.4	7	20	0	0	0	0	0
4	7	0.4	8	20	0	0	0	0	0
5	7	0.4	7	20	0	0	0	0	0
6	7	0.4	7	20	0	0	0	0	0
7	7	0.4	8	20	0	0	1	0	1
8	7	0.4	8	20	0	0	1	0	1
9	7	0.4	7	20	1	0	1	0	1
10	7	0.4	7	20	1	0	1	0	1
11	6	0.4	6	20	0	0	1	0	1
12	2	0.5	2	20	0	0	0	0	0
13	1	0.5	1	20	0	0	0	0	0
14	0.9	0.5	1	20	0	0	0	0	0
15	0.9	0.5	1	20	0	0	0	0	0
16	0.9	0.5	1	20	0	0	0	0	0
17	0.9	0.5	1	20	0	0	0	0	0
18	0.9	0.5	1	20	0	0	0	0	0
19	0.9	0.5	1	20	0	0	0	0	0
20	0.9	0.6	1	20	0	0	0	0	0
21	0.9	0.6	1	20	0	0	0	0	0
22	1	0.6	2	20	0	0	0	0	0
23	1	0.6	2	20	0	0	0	0	0
24	1	0.6	2	20	0	0	0	0	0
25	1	0.6	2	20	0	0	0	0	0
26	1	0.7	2	20	0	0	0	0	0
27	1	0.7	2	20	0	0	0	0	0
28	1	0.7	2	20	0	0	0	0	0
29	1	0.6	2	20	0	0	0	0	0
30	1	0.6	2	20	0	0	0	0	0
31	1	0.7	2	20	0	0	0	0	0
Totals	85	16	101	620	3	0	6	0	6

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). **Discharge Estimated**

M=Missing TBD=To be determined

Sep-21	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck. (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	1	0.7	2	20	0	0	0	0	0
2	0.9	0.8	2	20	0	0	0	0	0
3	0.8	0.8	2	20	0	0	0	0	0
4	0.8	0.8	2	20	0	0	0	0	0
5	0.7	0.8	2	20	0	0	0	0	0
6	0.7	0.8	1	20	0	0	0	0	0
7	0.7	0.5	1	20	0	0	0	0	0
8	0.9	0.5	1	20	0	0	0	0	0
9	1	0.5	2	20	0	0	0	0	0
10	1	0.5	2	20	0	0	0	0	0
11	1	0.5	2	20	0	0	0	0	0
12	1	0.5	2	20	0	0	0	0	0
13	1	0.5	2	20	0	0	0	0	0
14	1	0.5	2	20	0	0	0	0	0
15	1	0.5	2	20	0	0	0	0	0
16	1	0.5	2	20	0	0	0	0	0
17	0.7	0.5	1	20	0	0	0	0	0
18	0.7	0.5	1	20	0	0	0	0	0
19	0.7	0.5	1	20	0	0	0	0	0
20	0.7	0.5	1	20	0	0	0	0	0
21	0.7	0.5	1	20	0	0	0	0	0
22	0.8	0.5	1	20	0	0	0	0	0
23	0.7	0.5	1	20	0	0	0	0	0
24	0.6	0.5	1	20	0	0	0	0	0
25	0.6	0.5	1	20	0	0	0	0	0
26	0.6	0.6	1	20	0	0	0	0	0
27	0.6	0.7	1	20	0	0	0	0	0
28	0.7	0.6	1	20	0	0	0	0	0
29	0.7	0.6	1	20	0	0	0	0	0
30	0.7	0.6	1	20	0	0	0	0	0
Totals	26	17	43	600	0	0	0	0	0

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined

Oct-21	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	0.7	0.5	1	20	0	0	0	0	0
2	0.8	0.5	1	20	0	0	0	0	0
3	0.8	0.5	1	20	0	0	0	0	0
4	0.9	0.5	1	20	0	0	0	0	0
5	0.9	0.5	1	20	0	0	0	0	0
6	1	0.5	2	20	0	0	0	0	0
7	2	0.5	2	20	0	0	0	0	0
8	2	0.5	3	20	0	0	0	0	0
9	2	0.5	3	20	0	0	0	0	0
10	2	0.5	3	20	0	0	0	0	0
11	3	0.5	3	20	0	0	0	0	0
12	3	0.5	3	20	0	0	0	0	0
13	3	0.5	3	20	0	0	0	0	0
14	3	0.5	3	20	0	0	0	0	0
15	3	0.5	3	20	0	0	0	0	0
16	3	0.5	3	20	0	0	0	0	0
17	3	0.5	3	20	0	0	0	0	0
18	3	0.5	3	20	0	0	0	0	0
19	3	0.5	3	20	0	0	0	0	0
20	3	0.5	3	20	0	0	0	0	0
21	3	0.5	3	20	0	0	0	0	0
22	3	0.6	3	20	0	0	0	0	0
23	3	0.6	3	20	0	0	0	0	0
24	3	0.6	4	20	0	0	0	0	0
25	12	5.0	17	20	6	0	5	0	5
26	5	0.6	5	20	1	0	1	0	1
27	4	0.6	5	20	0	0	0	0	0
28	4	0.6	5	20	0	0	0	0	0
29	4	0.6	5	20	0	0	0	0	0
30	4	0.6	4	20	0	0	0	0	0
31	4	0.6	4	20	0	0	0	0	0
Totals	88	21	109	620	7	0	6	0	6

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined

Nov-21	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	4	0.6	5	20	0	0	0	0	0
2	4	0.6	5	20	0	0	0	0	0
3	4	0.6	4	20	0	0	0	0	0
4	4	0.6	4	20	0	0	0	0	0
5	3	0.6	4	20	0	0	0	0	0
6	3	0.6	4	20	0	0	0	0	0
7	3	0.6	4	20	0	0	0	0	0
8	3	0.6	4	20	0	0	0	0	0
9	3	0.6	4	20	0	0	0	0	0
10	3	0.6	4	20	0	0	0	0	0
11	3	0.6	3	20	0	0	0	0	0
12	3	0.6	3	20	0	0	0	0	0
13	3	0.6	3	20	0	0	0	0	0
14	2	0.6	3	20	0	0	0	0	0
15	2	0.6	3	20	0	0	0	0	0
16	2	0.6	3	20	0	0	0	0	0
17	2	0.6	3	20	0	0	0	0	0
18	2	0.6	3	20	0	0	0	0	0
19	2	0.6	3	20	0	0	0	0	0
20	2	0.6	3	20	0	0	0	0	0
21	2	0.6	3	20	0	0	0	0	0
22	2	0.6	3	20	0	0	0	0	0
23	2	0.6	2	20	0	0	0	0	0
24	2	0.6	2	20	0	0	0	0	0
25	2	0.7	2	20	0	0	0	0	0
26	2	0.7	2	20	0	0	0	0	0
27	1	0.7	2	20	0	0	0	0	0
28	1	0.7	2	20	0	0	0	0	0
29	1	0.7	2	20	0	0	0	0	0
30	1	0.7	2	20	0	0	0	0	0
Totals	74	19	93	600	0	0	0	0	0

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (V/CWPD). Discharge Estimated

M=Missing TBD=To be determined

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Dec-21									
1	1	0.7	2	20	0	0	0	0	0
2	1	0.7	2	20	0	0	0	0	0
3	1	0.7	2	20	0	0	0	0	0
4	1	0.7	2	20	0	0	0	0	0
5	1	0.7	2	20	0	0	0	0	0
6	1	0.7	2	20	0	0	0	0	0
7	1	0.7	2	20	0	0	0	0	0
8	1	0.7	2	20	0	0	0	0	0
9	2	0.7	2	20	1	0	0	0	0
10	2	0.7	2	20	0	0	0	0	0
11	2	0.7	2	20	0	0	0	0	0
12	2	0.7	2	20	1	0	0	0	0
13	2	1	3	20	0	0	0	0	0
14	118	86	204	20	23	0	71	119	190
15	78	10	88	20	25	0	20	43	63
16	27	9	36	20	22	0	19	10	29
17	7	9	16	20	12	0	10	0	10
18	5	9	14	20	9	0	7	0	7
19	5	9	14	20	4	0	4	0	4
20	4	9	13	20	3	0	2	0	2
21	4	9	13	20	3	0	5	0	5
22	4	9	13	20	2	0	4	0	4
23	35	102	137	20	21	0	127	80	207
24	141	74	215	20	24	0	30	229	259
25	99	28	127	20	7	0	20	70	90
26	93	35	128	20	8	0	20	80	100
27	76	23	99	20	7	0	20	51	71
28	39	23	62	20	6	0	20	22	42
29	40	42	82	20	16	0	22	35	58
30	98	104	202	20	26	0	25	150	175
31	131	47	178	20	26	0	26	118	145
Totals	1023	645	1668	620	247	0	452	1008	1460

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). *Discharge Estimated*

M=Missing TBD=To be determined

Jan-22	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	95	24	119	20	25	0	26	69	96
2	93	22	115	20	24	0	26	60	86
3	64	19	83	20	20	0	21	41	62
4	41	17	58	20	22	0	20	21	41
5	34	16	50	20	21	0	20	15	35
6	30	15	45	20	21	0	20	15	35
7	27	14	41	20	21	0	20	9	29
8	24	13	37	20	21	0	20	7	27
9	22	12	34	20	21	0	20	6	26
10	21	12	33	20	21	0	20	5	25
11	19	11	30	20	21	0	20	4	24
12	18	11	29	20	21	0	20	3	23
13	17	10	27	20	21	0	20	2	22
14	19	10	29	20	21	0	20	2	22
15	15	9	24	20	21	0	20	0	20
16	15	9	24	20	20	0	19	0	19
17	15	9	24	20	20	0	19	0	19
18	14	8	22	20	20	0	20	0	20
19	14	8	22	20	20	0	19	0	19
20	14	8	22	20	20	0	18	0	18
21	13	7	20	20	19	0	17	0	17
22	13	7	20	20	18	0	16	0	16
23	12	7	19	20	17	0	16	0	16
24	12	7	19	20	16	0	15	0	15
25	12	6	18	20	16	0	16	0	16
26	12	6	18	20	16	0	15	0	15
27	11	6	17	20	16	0	15	0	15
28	11	5	16	20	16	0	14	0	14
29	11	5	16	20	16	0	14	0	14
30	10	5	15	20	15	0	14	0	14
31	11	5	16	20	15	0	14	0	14
<b>Totals</b>	<b>739</b>	<b>322</b>	<b>1061</b>	<b>620</b>	<b>600</b>	<b>0</b>	<b>576</b>	<b>261</b>	<b>836</b>

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Feb-22									
1	10	5	15	20	15	0	14	0	14
2	10	4	14	20	14	0	12	0	12
3	10	4	14	20	13	0	12	0	12
4	9	4	13	20	13	0	12	0	12
5	10	4	14	20	13	0	11	0	11
6	9	4	13	20	13	0	11	0	11
7	9	4	12	20	12	0	11	0	11
8	9	4	12	20	12	0	10	0	10
9	9	3	12	20	11	0	9	0	9
10	9	3	12	20	10	0	9	0	9
11	8	3	12	20	10	0	8	0	8
12	9	3	12	20	9	0	8	0	8
13	8	3	11	20	9	0	8	0	8
14	8	3	11	20	10	0	9	0	9
15	7	3	10	20	10	0	8	0	8
16	8	3	11	20	10	0	9	0	9
17	8	3	10	20	10	0	8	0	8
18	8	3	11	20	9	0	10	0	10
19	7	3	10	20	9	0	11	0	11
20	7	3	10	20	9	0	10	0	10
21	7	3	10	20	8	0	9	0	9
22	7	3	10	20	8	0	9	0	9
23	7	3	10	20	8	0	9	0	9
24	7	3	10	20	9	0	10	0	10
25	7	3	10	20	9	0	10	0	10
26	6	3	9	20	8	0	10	0	10
27	6	3	9	20	8	0	10	0	10
28	6	3	9	20	7	0	9	0	9
Totals	224	90	314	560	287	0	277	0	277

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
Mar-22									
1	6	3	9	20	7	0	8	0	8
2	6	3	8	20	6	0	7	0	7
3	6	3	8	20	6	0	7	0	7
4	6	3	8	20	6	0	7	0	7
5	6	3	9	20	6	0	7	0	7
6	6	3	9	20	6	0	7	0	7
7	6	2	9	20	6	0	6	0	6
8	6	2	9	20	6	0	5	0	5
9	6	2	8	20	6	0	5	0	5
10	6	2	8	20	5	0	5	0	5
11	6	2	8	20	6	0	4	0	4
12	5	2	7	20	5	0	4	0	4
13	5	2	7	20	5	0	4	0	4
14	5	2	7	20	6	0	4	0	4
15	5	2	7	20	6	0	4	0	4
16	5	2	7	20	5	0	4	0	4
17	5	2	7	20	5	0	4	0	4
18	5	2	7	20	4	0	4	0	4
19	5	2	7	20	3	0	3	0	3
20	5	2	7	20	4	0	3	0	3
21	5	2	7	20	3	0	3	0	3
22	5	2	7	20	3	0	3	0	3
23	5	2	7	20	3	0	2	0	2
24	5	2	7	20	3	0	3	0	3
25	4	2	7	20	3	0	3	0	3
26	4	2	7	20	3	0	3	0	3
27	4	2	7	20	3	0	3	0	3
28	17	16	33	20	15	0	12	5	18
29	10	3	13	20	17	0	15	0	15
30	7	3	9	20	10	0	8	0	8
31	6	3	9	20	8	0	7	0	7
Totals	180	86	266	620	180	0	165	5	170

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined

Apr-22	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	6	3	9	20	8	0	6	0	6
2	6	3	8	20	6	0	6	0	6
3	6	3	8	20	5	0	6	0	6
4	5	2	8	20	7	0	5	0	5
5	5	2	7	20	5	0	5	0	5
6	5	2	7	20	5	0	4	0	4
7	4	2	7	20	5	0	4	0	4
8	4	2	7	20	3	0	4	0	4
9	4	2	6	20	3	0	3	0	3
10	4	2	6	20	3	0	3	0	3
11	4	2	7	20	3	0	3	0	3
12	4	2	6	20	4	0	3	0	3
13	4	2	6	20	3	0	3	0	3
14	4	2	6	20	4	0	3	0	3
15	4	2	6	20	4	0	3	0	3
16	4	2	6	20	4	0	4	0	4
17	4	2	6	20	4	0	3	0	3
18	4	2	6	20	4	0	3	0	3
19	4	2	6	20	3	0	3	0	3
20	4	2	6	20	3	0	3	0	3
21	4	2	6	20	3	0	3	0	3
22	4	2	6	20	3	0	3	0	3
23	4	2	6	20	4	0	3	0	3
24	4	2	5	20	3	0	3	0	3
25	3	2	5	20	3	0	3	0	3
26	3	2	5	20	3	0	3	0	3
27	3	2	5	20	2	0	2	0	2
28	3	2	5	20	2	0	3	0	3
29	3	2	5	20	3	0	2	0	2
30	3	2	5	20	2	0	2	0	2
Totals	127	61	188	600	113	0	103	0	103

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined

	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
May-22									
1	3	2	5	20	2	0	2	0	2
2	3	2	5	20	3	0	2	0	2
3	3	1	5	20	3	0	2	0	2
4	3	1	4	20	3	0	2	0	2
5	3	1	4	20	3	0	2	0	2
6	3	1	4	20	3	0	2	0	2
7	3	1	4	20	3	0	2	0	2
8	3	1	4	20	3	0	2	0	2
9	3	1	4	20	3	0	2	0	2
10	3	1	4	20	3	0	2	0	2
11	3	1	4	20	3	0	2	0	2
12	3	1	4	20	3	0	2	0	2
13	2	1	4	20	2	0	1	0	1
14	2	1	3	20	1	0	1	0	1
15	2	1	3	20	0	0	1	0	1
16	2	1	3	20	1	0	1	0	1
17	2	1	3	20	1	0	1	0	1
18	2	1	3	20	0	0	1	0	1
19	2	1	3	20	1	0	1	0	1
20	3	1	4	20	1	0	1	0	1
21	3	1	4	20	2	0	1	0	1
22	2	1	3	20	2	0	1	0	1
23	2	1	3	20	1	0	1	0	1
24	2	1	3	20	1	0	1	0	1
25	2	1	3	20	0	0	1	0	1
26	2	1	3	20	0	0	1	0	1
27	2	1	3	20	0	0	1	0	1
28	2	1	3	20	0	0	1	0	1
29	2	0.9	3	20	2	0	1	0	1
30	2	0.9	3	20	1	0	1	0	1
31	2	0.9	3	20	1	0	1	0	1
Totals	76	37	113	620	51	0	43	0	43


\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined


Jun-22	(1)	(2)	(1) + (2)	B.O. Required Flow Release (cfs)	(3)	(4)	(5)	(6)	(5) + (6)
	Source Stream Mean Daily Flows				Robles Facility Mean Daily Flows				
	Matilija Ck D/S Dam* (cfs)	North Fork Matilija Ck.* (cfs)	Sum of Creek Flows (cfs)		Fishway Ladder (cfs)	Auxiliary Pipe (cfs)	VRNMO Weir (cfs)	Diversion Canal (cfs)	Total Inflow (cfs)
1	2	0.9	3	20	0	0	1	0	1
2	2	0.8	3	20	0	0	1	0	1
3	2	0.9	3	20	0	0	0	0	0
4	2	1	3	20	0	0	1	0	1
5	2	0.9	3	20	0	0	1	0	1
6	2	0.9	3	20	0	0	0	0	0
7	2	0.9	2	20	0	0	0	0	0
8	2	0.9	2	20	1	0	0	0	0
9	1	0.8	2	20	1	0	0	0	0
10	1	0.8	2	20	1	0	0	0	0
11	1	0.8	2	20	1	0	0	0	0
12	1	0.8	2	20	1	0	0	0	0
13	1	0.9	2	20	1	0	0	0	0
14	1	0.8	2	20	0	0	0	0	0
15	1	0.8	2	20	0	0	0	0	0
16	1	0.8	2	20	0	0	0	0	0
17	1	0.9	2	20	1	0	0	0	0
18	1	0.9	2	20	1	0	0	0	0
19	1	0.9	2	20	0	0	0	0	0
20	0.9	0.7	2	20	0	0	0	0	0
21	0.8	0.6	1	20	0	0	0	0	0
22	0.8	0.6	1	20	0	0	0	0	0
23	0.8	0.5	1	20	0	0	0	0	0
24	0.7	0.5	1	20	0	0	0	0	0
25	0.7	0.5	1	20	0	0	0	0	0
26	0.7	0.5	1	20	0	0	0	0	0
27	0.6	0.5	1	20	0	0	0	0	0
28	0.7	0.5	1	20	0	0	0	0	0
29	0.7	0.4	1	20	0	0	0	0	0
30	0.7	0.4	1	20	0	0	0	0	0
Totals	35	22	57	600	10	0	4	0	4

\*Flow data from Matilija Ck and North Fork Matilija Ck are preliminary and subject to change (VCWPD). Discharge Estimated

M=Missing TBD=To be determined

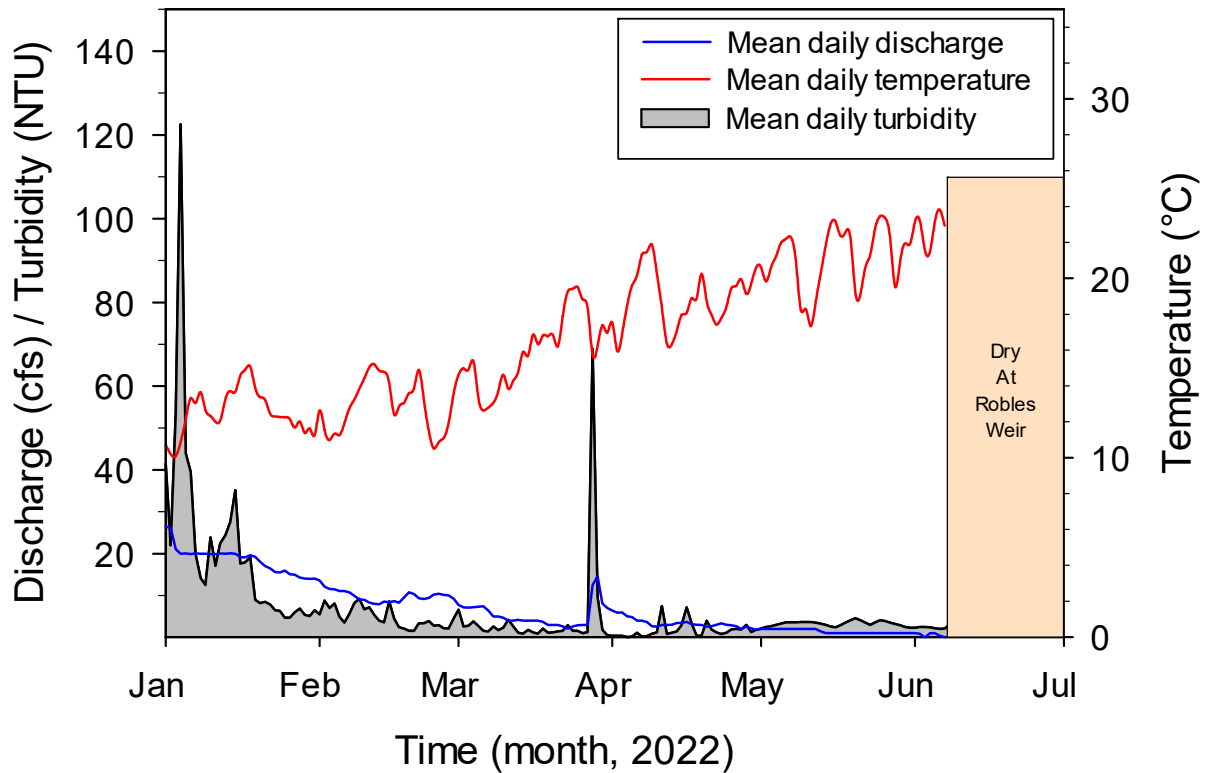

Appendix 8. Mean daily discharge, water temperature, and turbidity at the Robles Fish Facility during the 2022 fish passage season.

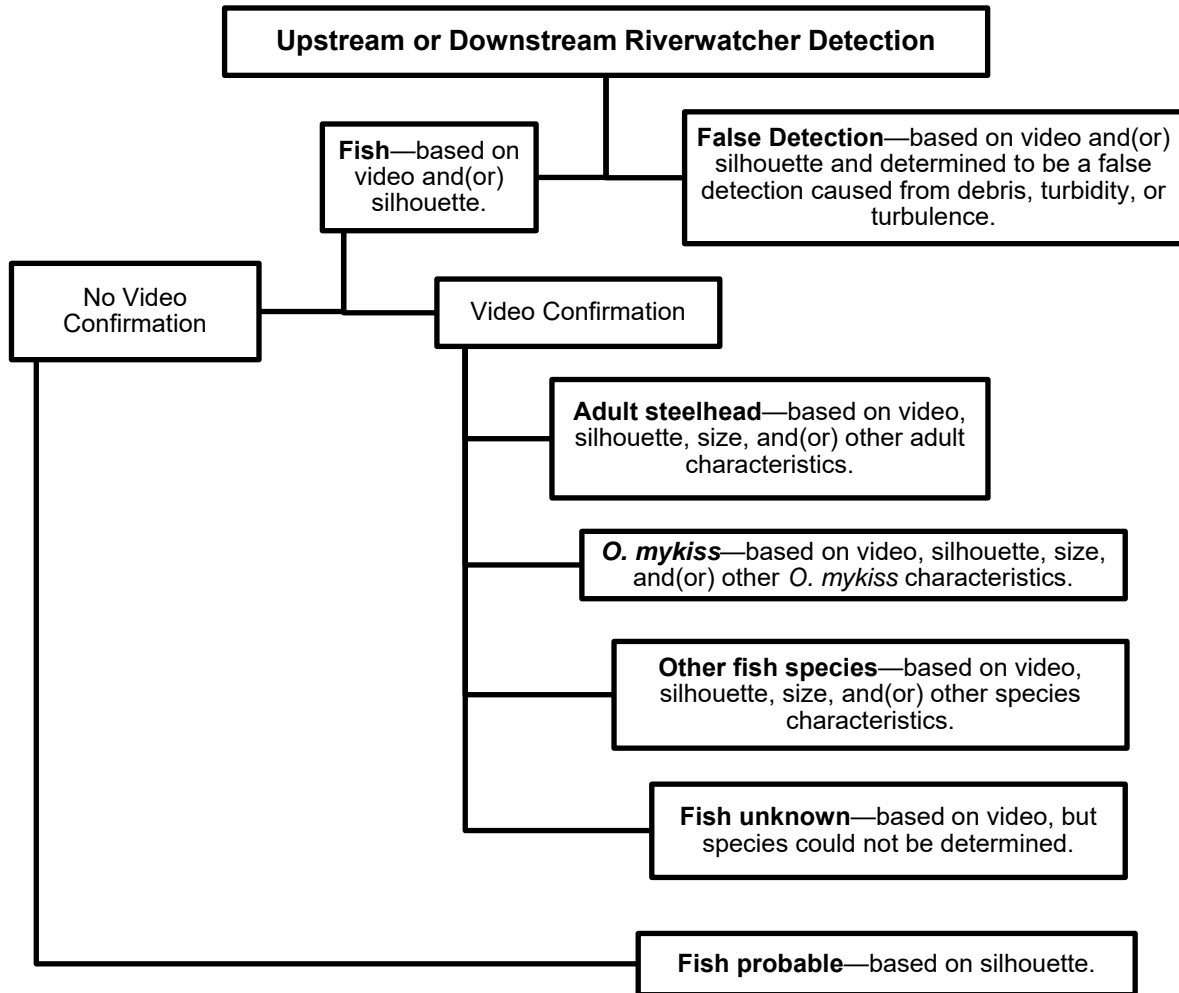


Appendix 9. Riverwatcher detection classification flow chart that outlines the pathways for upstream and downstream detections.

Appendix 10. Summary of Riverwatcher detections classified as *O. mykiss* and fish probable for the 2022 fish passage season.

	Upstream	Downstream
<i>O. mykiss</i>	0	0
Fish, non <i>O. mykiss</i>	3	3
Fish, unknown	0	0
Fish, probable	0	0
False detections	826	1982
Total	829	1985
Mean date - <i>O. mykiss</i>	-	-
Mean date - fish, non <i>O. mykiss</i>	03/16/2022	02/13/2022
Mean date - fish, unknown	-	-
Mean date - fish, probable	-	-
Mean time - <i>O. mykiss</i> (24h)	-	-
Mean time - fish, non <i>O. mykiss</i> (24h)	16:16	13:23
Mean time - fish, unknown (24h)	-	-
Mean time - fish, probable (24h)	-	-
Mean length - <i>O. mykiss</i> (cm)	-	-
Mean length - fish, non <i>O. mykiss</i> (cm)	41.1	44.0
Mean length - fish, unknown (cm)	-	-
Mean length - fish, probable (cm)	-	-
Mean daily temperature - <i>O. mykiss</i> (°C)	-	-
Mean daily temperature - fish, non <i>O. mykiss</i> (°C)	16.2	14.9
Mean daily temperature - fish, unknown (°C)	-	-
Mean daily temperature - fish, probable (°C)	-	-
Mean daily turbidity - <i>O. mykiss</i> (NTU)	-	-
Mean daily turbidity - fish, non <i>O. mykiss</i> (NTU)	0.8	19.9
Mean daily turbidity - fish, unknown (NTU)	-	-
Mean daily turbidity - fish, probable (NTU)	-	-
Mean daily turbidity - false detections (NTU)	31.0	17.5
Mean daily discharge - <i>O. mykiss</i> (cfs)	-	-
Mean daily discharge - fish, non <i>O. mykiss</i> (cfs)	4.0	12.7
Mean daily discharge - fish, unknown (cfs)	-	-
Mean daily discharge - fish, probable (cfs)	-	-
Mean daily discharge - false detections (cfs)	12.0	8.9

Appendix 11. *O. mykiss* relative abundance survey index sites in the Ventura Basin.


Site No.	Location	River km	Site	Lat.	Long.	Length (m)	Width (m)
1	Ventura River	0.9	Main Street pool	34.28126	-119.30887	25.1	10.0
		0.9	Main Street riffle	34.28164	-119.30893	34.0	8.0
2	Ventura River	9.4	Foster Park pool 1	34.35236	-119.30790	25.0	15.4
		10.0	Foster Park pool 2	34.35508	-119.30988	46.0	16.0
		9.7	Foster Park riffle	34.35308	-119.30877	45.0	11.0
3	Ventura River	13.0	San Antonio conf. pool 1	34.38042	-119.30752	33.0	22.0
		13.0	San Antonio conf. riffle	34.38011	-119.30755	42.0	14.0
		12.9	San Antonio conf. pool 2	34.37969	-119.30781	50.0	10.0
4	Ventura River	18.8	Hwy 150 pool 1	34.42643	-119.30220	43.3	14.0
		18.8	150 pool 2	34.42689	-119.30123	49.5	9.0
		18.7	Hwy 150 riffle	34.42576	-119.30258	43.6	11.0
5	Ventura River	22.1	Land Cons. pool 1	34.45342	-119.29314	50.1	19.1
		22.2	Land Cons. pool 2	34.45448	-119.29293	48.6	15.1
		22.1	Land Cons. Riffle	34.45411	-119.29315	44.6	18.8
6	Ventura River	23.2	Robles weir pools	34.46306	-119.29058	58.7	19.0
		23.3	Robles glide	34.46368	-119.29065	78.3	17.3
		23.4	Robles entrance pool	34.46446	-119.29058	39.8	21.8
		23.4	Fish ladder entrance box	34.46460	-119.29062	15.0	3.0
		23.5	Robles screenbay	34.46451	-119.29133	42.2	13.5
		23.5	Robles forebay	34.46503	-119.29053	33.0	17.2
7	San Antonio Cr.	0.2	Lower San Antonio pool 1	34.38088	-119.30542	16.0	6.0
		0.2	Lower San Antonio riffle	34.38098	-119.30711	20.2	3.5
		0.4	Lower San Antonio pool 2	34.38103	-119.30657	40.0	6.0
8	San Antonio Cr.	9.4	Upper San Antonio riffle	34.43268	-119.25090	25.0	5.0
		9.5	Upper San Antonio pool	34.43241	-119.25095	19.8	5.5
9	NF Matilija Cr.	0.1	Lower NF pool 1	34.48508	-119.30105	7.3	13.3
		0.1	Lower NF pool 2	34.48533	-119.30138	7.9	10.9
		0.2	Lower NF riffle	34.48523	-119.30198	17.8	8.0
10	NF Matilija Cr.	6.6	Upper NF pool	34.50956	-119.27520	29.0	9.0
		6.6	Upper NF riffle	34.50933	-119.27528	33.1	7.5
11	Matilija Cr.	0.3	Lower Matilija pool	34.48282	-119.30170	21.1	24.7
		0.3	Lower Matilija riffle	34.48302	-119.30154	15.9	8.0
12	Matilija Cr.	2.1	Upper Matilija pool	34.49190	-119.31599	89.4	13.7
		2.1	Upper Matilija riffle	34.49233	-119.31704	51.0	9.0
14	San Antonio Cr.	4.3	Fraser St. pool	34.40276	-119.28169	12.8	13.8
		4.4	Fraser St. riffle	34.40291	-119.28157	30.8	5.9
15	Ventura River	8.5	Bedrock pool	34.34539	-119.29931	50.0	17.0
		8.5	Bedrock pool riffle	34.34569	-119.29958	37.0	6.0

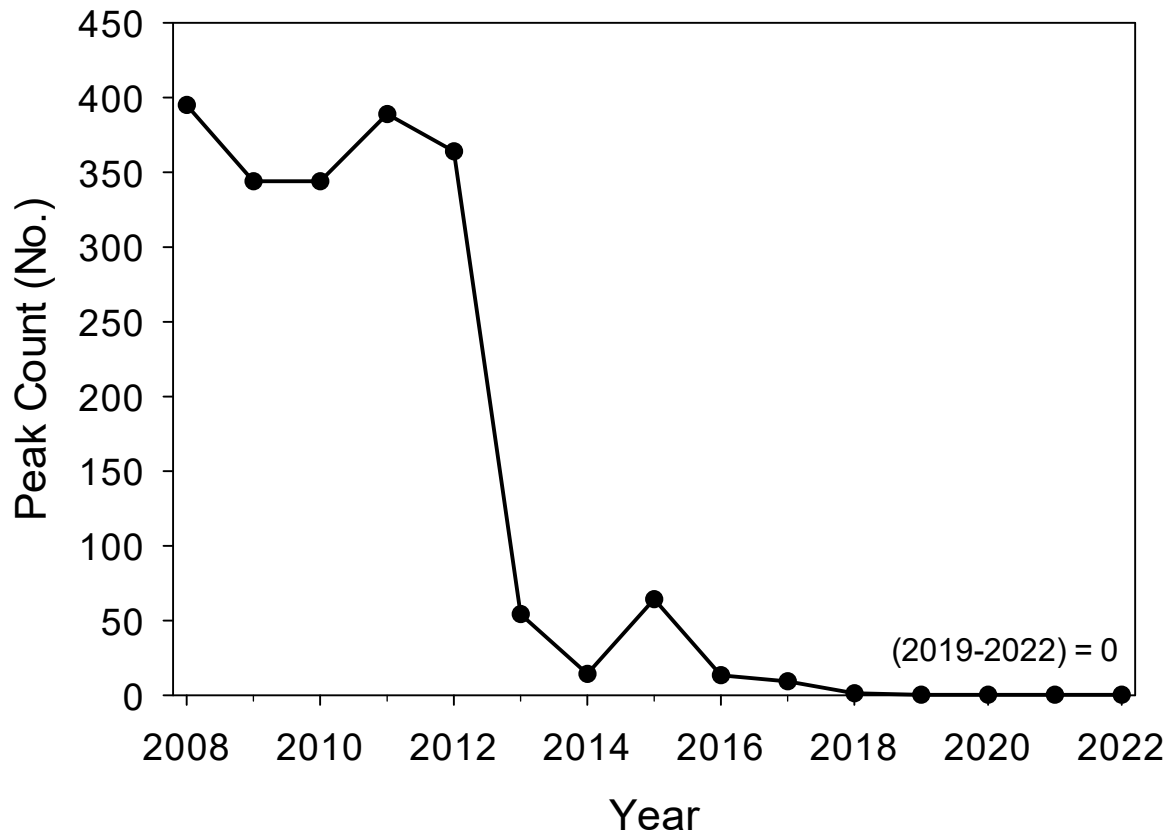


Appendix 12. Peak snorkel counts of *O. mykiss* during the period 2008-2022 at survey index sites in the Ventura Basin.

Appendix 13. *O. mykiss* spawning index sites in the Ventura Basin.

Site No.	Unit	Location	River km	Description	Lat.	Long.	Length (m)	Width (m)	Spawning Area (m <sup>2</sup> )
24	1	Ventura River	0.8	Main St. Bridge	34.28085	-119.30862	220.0	10.0	2,200
2	1	Ventura River	7.9	Near Treatment Plant	34.34030	-119.29782	90.0	18.0	1,620
	2		8.1	Near Treatment Plant	34.34208	-119.29849	39.0	20.0	780
4	1	Ventura River	15.5	Near Santa Ana Blvd bridge	34.39950	-119.30853	26.7	8.0	214
5	1	Ventura River	18.7	Upstream of Hwy 150	34.42641	-119.30227	18.0	10.0	180
6	1	Ventura River	22.1	Land Conservancy pool tailout	34.45334	-119.29309	18.1	19.5	353
	2		22.2	Land Conservancy pool tailout	34.45445	-119.29298	16.3	14.7	240
7	1	Ventura River	23.3	Robles-1st weir pool	34.46334	-119.29061	15.4	23.9	368
	2		23.4	Robles tailout of entrance pool	34.46436	-119.29045	18.2	21.9	399
8	2	Ventura River	24.3	Upstream of Robles	34.46504	-119.29032	6.2	15.4	95
	3		23.4	Upstream of Robles forebay	34.46504	-119.29032	80.0	6.0	480
12	1	NF Matilija Cr.	0.7	Lower NF Matilija Cr.	34.48825	-119.30525	41.0	9.0	369
13	1	NF Matilija Cr.	6.6	Downstream of Wheeler Gorge	34.50911	-119.27501	23.0	8.0	184
	2		6.6	Downstream of Wheeler Gorge	34.50960	-119.27528	22.3	8.0	178
14	1	Matilija Cr.	1.9	Lake Matilija delta	34.49000	-119.31446	26.2	14.6	383
	2		2.1	Upstream of Lake Matilija	34.49198	-119.31645	15.0	10.0	150
	3		2.2	Upstream of Lake Matilija	34.49209	-119.31661	315	9.0	2,835
15	1	Matilija Cr.	8.4	End of Matilija Road	34.50456	-119.37449	20.0	19.0	380
17	1	Ventura River	9.3	DS of Foster to US reach	34.35069	-119.30463	1750	11.0	19,250
18	1	Ventura River	12.3	Casitas Springs	34.37354	-119.30877	60	12.0	960
	2		12.7	Casitas Springs	34.37712	-119.30721	230	9.0	2070
19	1	San Antonio Cr.	0.0	Mouth to end of Old Cr. Rd. reach	34.38030	-119.30738	2160	8.0	17,280
20	1	San Antonio Cr.	4.2	DS to US of Frasier St.	34.40197	-119.28237	180	8.0	1,440
21	1	San Antonio Cr.	7.8	Camp Comfort reach	34.42493	-119.26110	690	5.0	3,450
22	1	San Antonio Cr.	9.5	Upper San Antonio Cr. reach	34.43269	-119.25087	640	5.0	3,200
23	1	NF Matilija Cr.	0.1	Lower NF Matilija Cr.	34.48520	-119.30118	120	6.0	720
25	1	NF Matilija Cr.	4.1	Near Wheeler's Springs Reach	34.50826	-119.28955	300	4.5	1,350
26	1	NF Matilija Cr.	1.0	Downstream of NF gage bridge	34.49049	-119.30586	302	4.3	1,299
27	1	Matilija Cr.	5.7	Upstream Matilija hot springs	34.50030	-119.34993	105	8.0	840
Total =									63,266

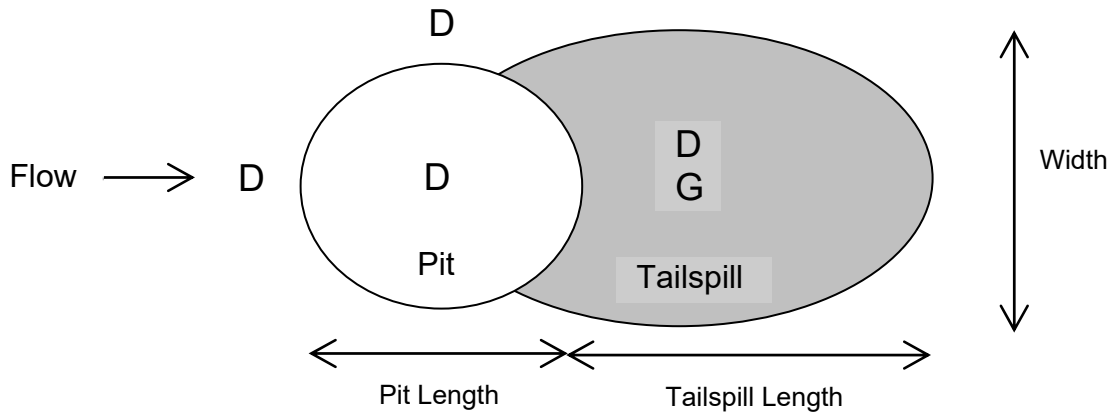

Appendix 14. Diagram of *O. mykiss* redds measurements. (D) = locations of depth measurements and (G) = location of gravel substrate sampling.

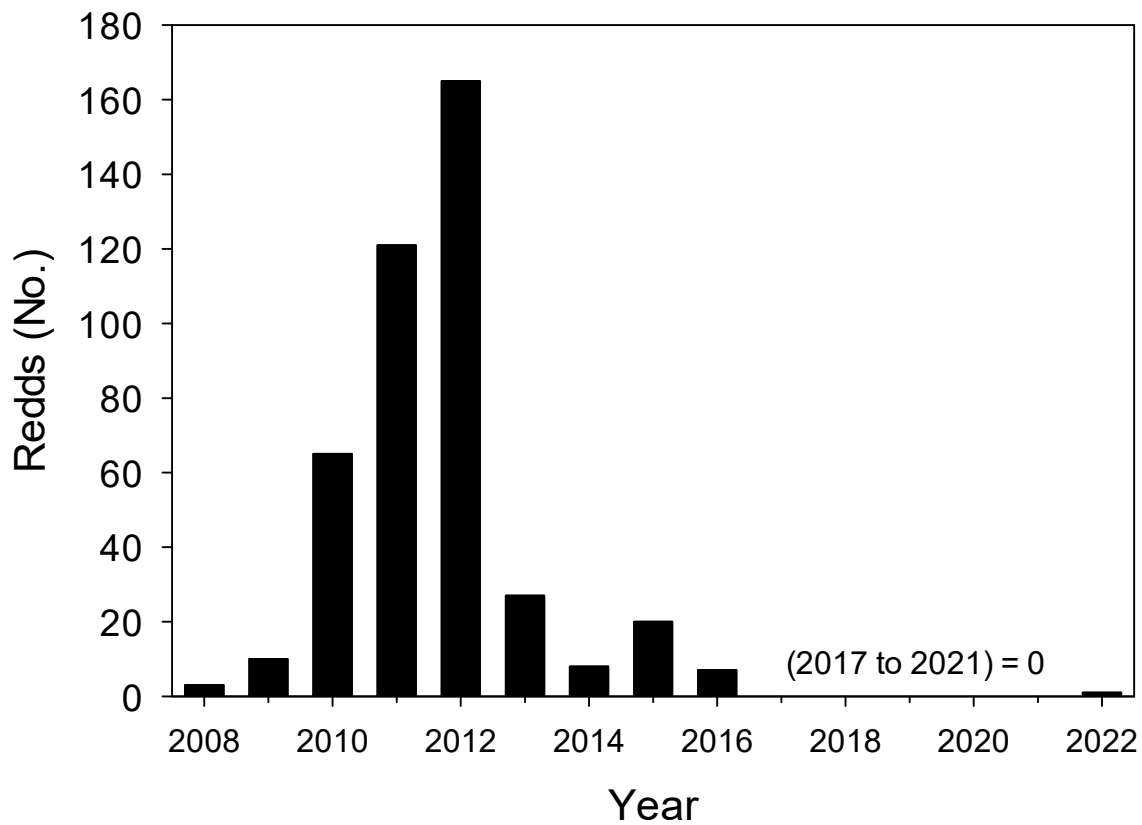


Appendix 15. Total number of *O. mykiss* redds counted at index spawning sites from 2008 through 2022 spawning years.

**Appendix 16. Water quality monitoring sites and sampling summary.**


Site Number	Site Description	Site Location <sup>a</sup>	Sampling Method <sup>b</sup>	Sampling Type	Frequency
1	Estuary	V 0.3 km	Multiparameter	Grab profile	Monthly
2	Main St. Bridge	V 1.0 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
3	Foster Park	V 9.7 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
4	Santa Ana Blvd Bridge	V 15.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
5	Hwy 150 Bridge	V 18.7 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
6	Robles Dam	V 23.5 km	Temperature Multiparameter Turbidity Weather	Continuous Grab Continuous Continuous	30 min Monthly Hourly 30 min
7	North Fork Matilija	N 1.3 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
8	Below Matilija Dam	M 1.0 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
9	Above Matilija Dam	M 2.1 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
10	Middle Matilija	M 8.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
11	Lower San Antonio	S 0.3 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
12	Middle San Antonio	S 9.5 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
13	Lower Coyote	C 0.4 km	Temperature Multiparameter	Continuous Grab	30 min Monthly
14	Fraser St.	S 4.4 km	Temperature	Continuous	30 min

<sup>a</sup>Site location is identified by the river system and kilometers from its confluence. C = Coyote Creek, M = Matilija Creek, N = North Fork Matilija Creek, S = San Antonio Creek, V = Ventura River.


<sup>b</sup>Temperature data were collected using programmable loggers. Multiparameter water quality probe was used to collect water quality data including: temperature, dissolved oxygen, conductivity, salinity, pH, turbidity (separate meter). Turbidity data was collected using a programmable logger.

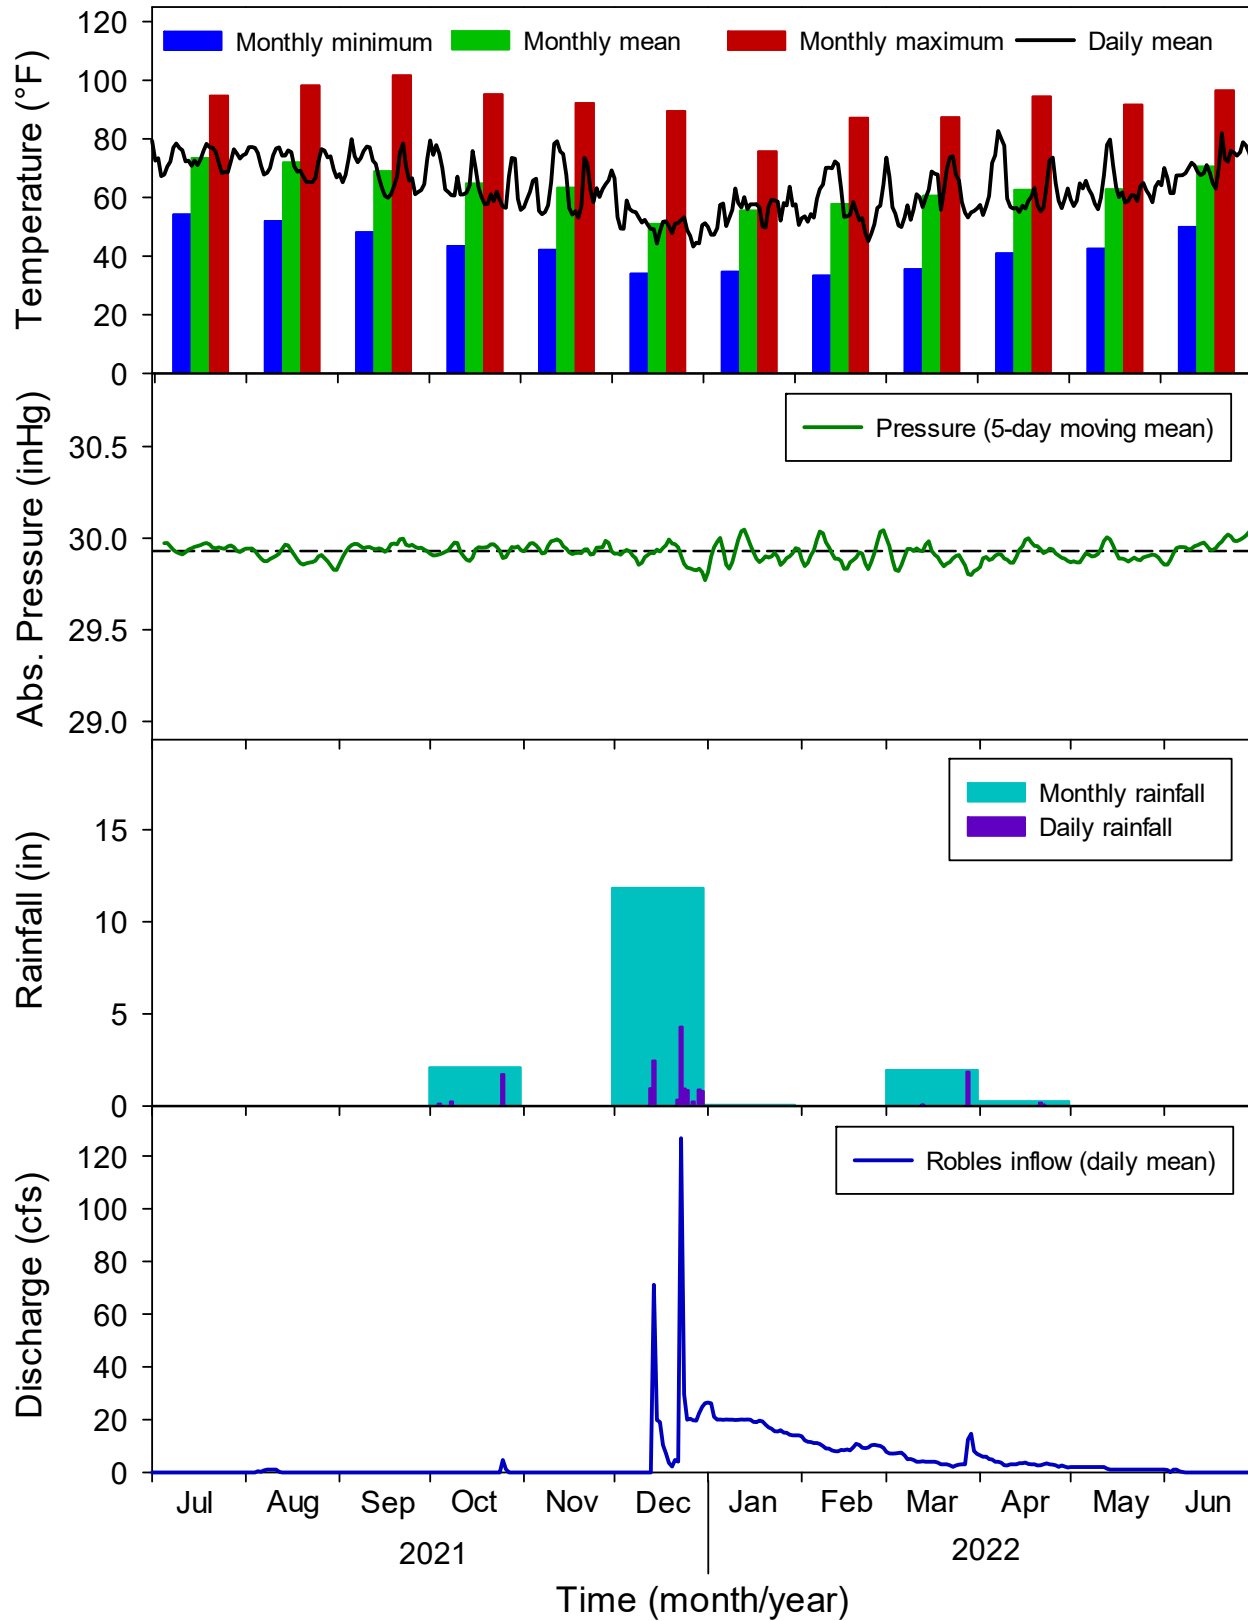

Appendix 17. Summary of weather and discharge data at the Robles Fish Facility for the reporting period.

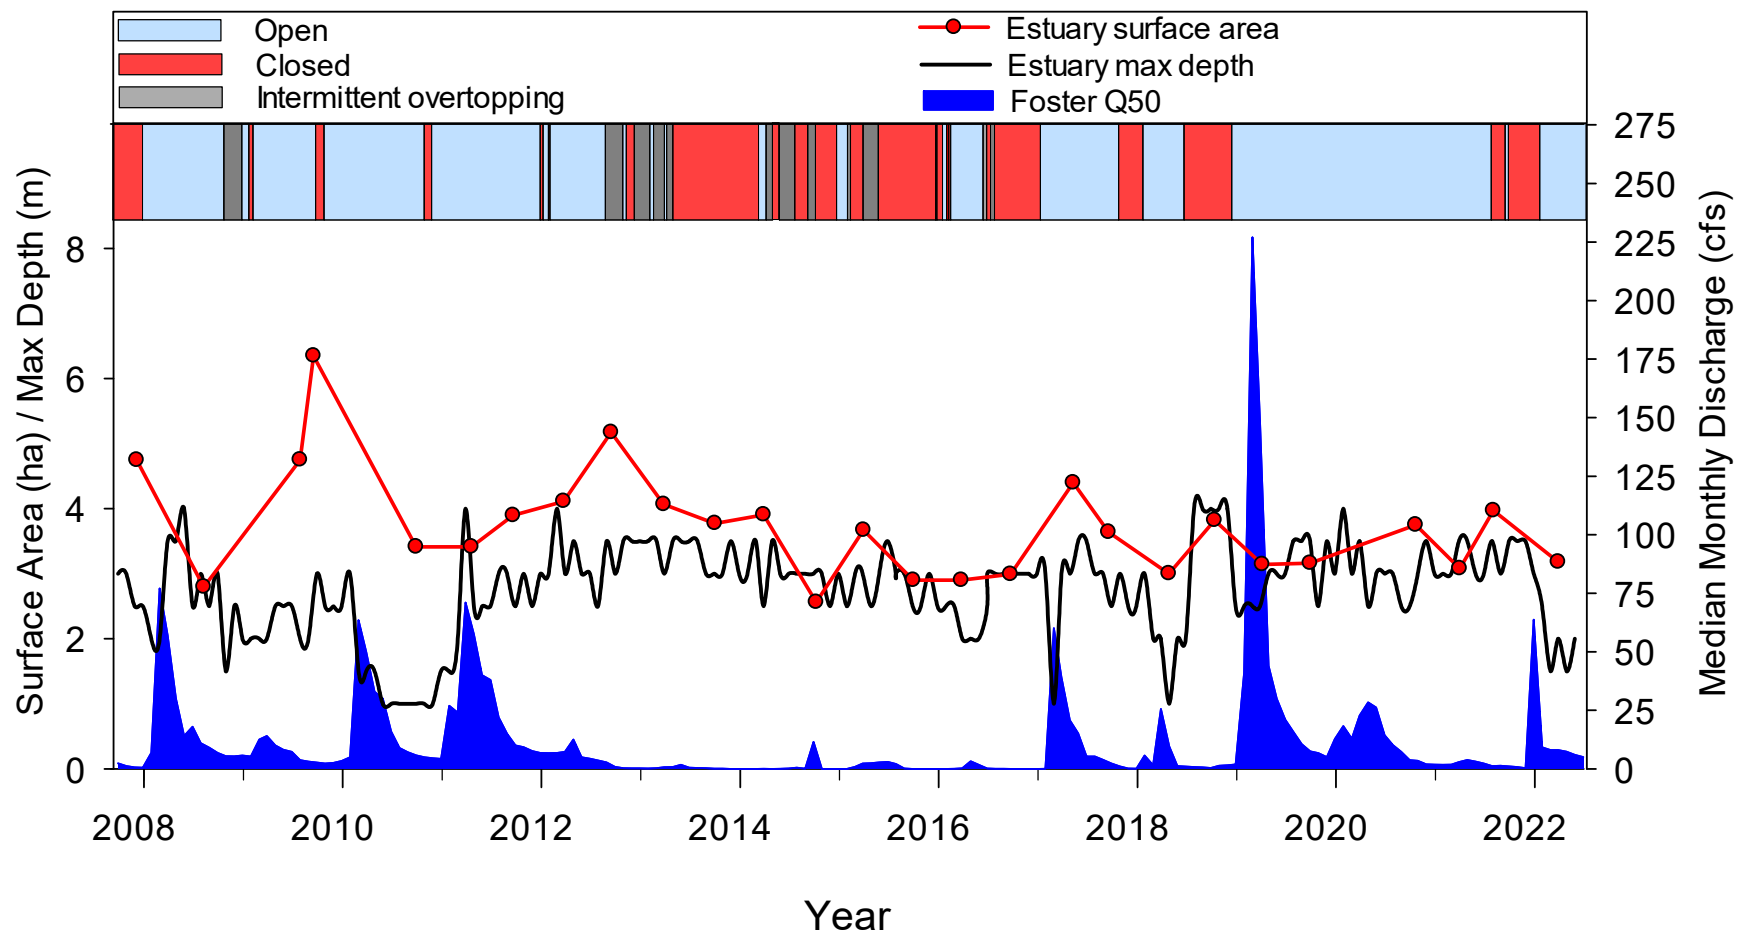

Appendix 18. Ventura River estuary/lagoon water depth, surface area, sandbar status, and discharge at Foster Park from 2008 to 2022.

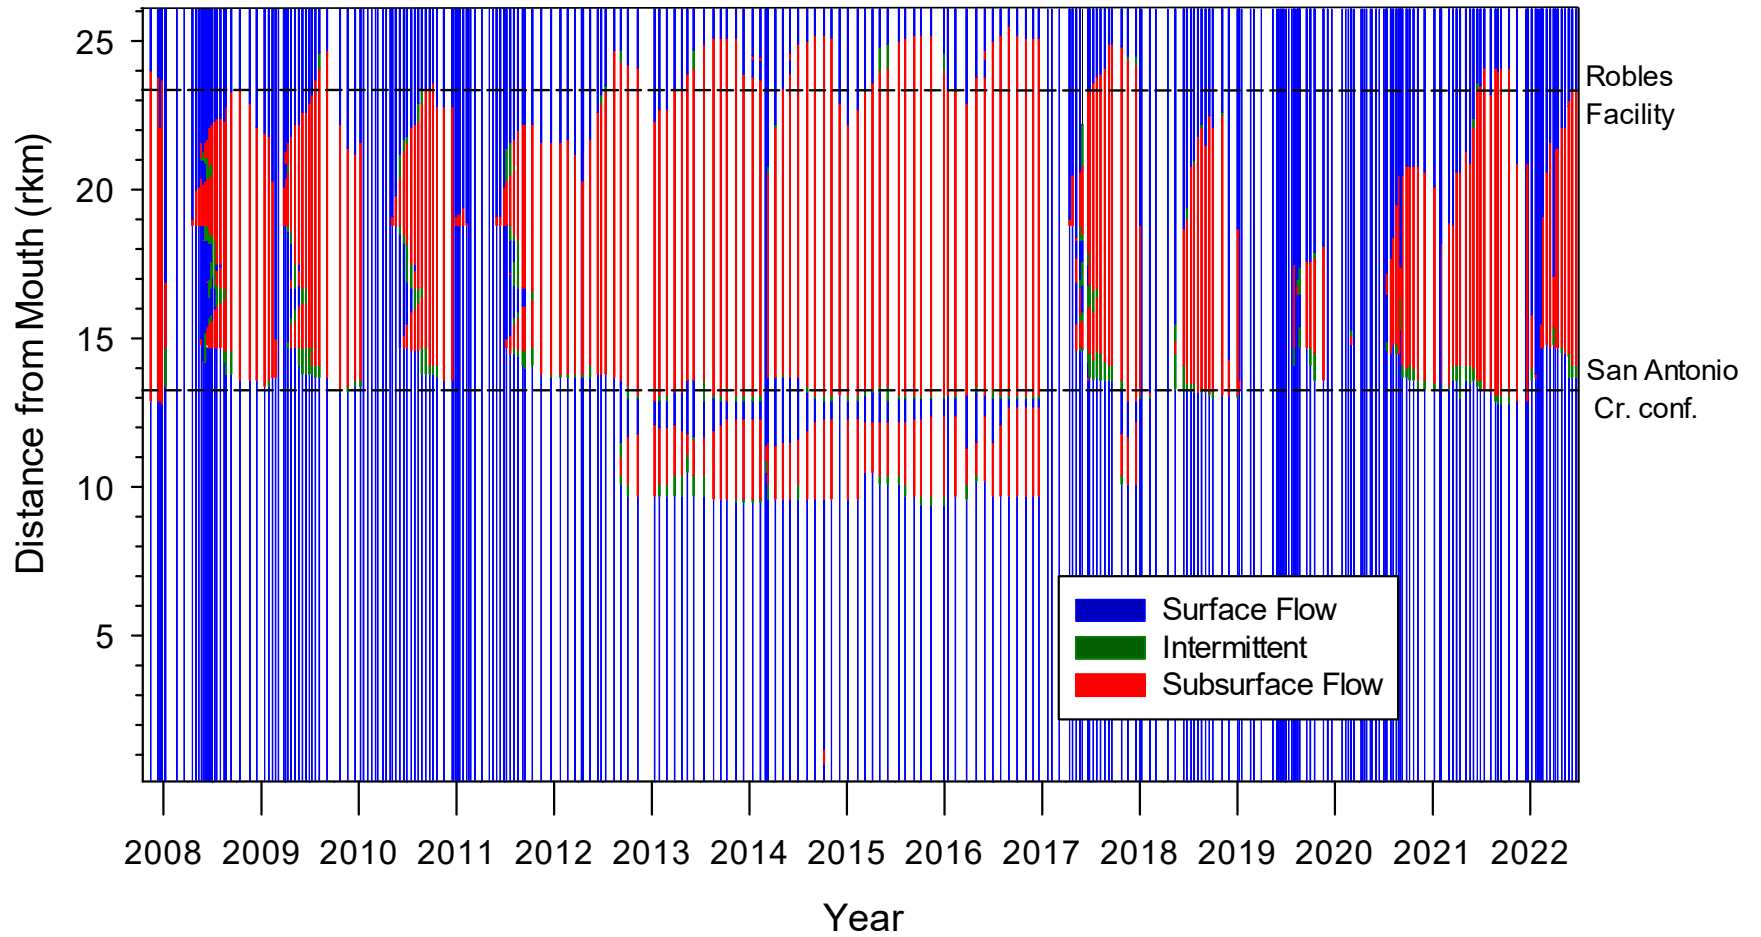


Appendix 19. Ventura River channel surface and subsurface flow status for the lower 26 km from 2007 to 2022.

Appendix 20. Photographic monitoring sites within the Ventura River basin.

Site Number	Site Description	Site Location <sup>a</sup>	Photo Direction	Frequency
1	Train bridge in estuary, east bank	V 0.3 km	Downstream	Biannual
2	Train bridge in estuary, west bank	V 0.3 km	Upstream Downstream	Biannual
3	Main Street Bridge	V 1.0 km	Upstream Downstream	Biannual
4	Shell Road Bridge	V 5.2 km	Upstream Downstream	Biannual
5	Casitas Vista Road Bridge (Foster Park)	V 9.7 km	Upstream Downstream	Biannual
6	Santa Ana Boulevard Bridge	V 15.5 km	Upstream Downstream	Biannual
7	Highway 150 Bridge	V 18.7 km	Upstream Downstream	Biannual
8	Robles Fish Passage Facility	V 23.5 km	Downstream	Biannual
9	Camino Cielo Road Bridge	V 25.7 km	Upstream Downstream	Biannual
10	Highway 33 Bridge at NF Matilija USGS Gauging Station	N 1.3 km	Upstream Downstream	Biannual
11	End of North Matilija Road	M 8.5 km	Upstream Downstream	Biannual
12	Highway 33 Bridge near Old Creek Road	S 0.3 km	Upstream Downstream	Biannual
13	Creek Road near Creek Lane	S 9.5 km	Upstream Downstream	Biannual
14	Santa Ana Road Bridge	C 0.4 km	Upstream Downstream	Biannual

<sup>a</sup>Site location is identified by the river or tributary system and kilometers from its confluence. C = Coyote Creek, M = Matilija Creek, N = North Fork Matilija Creek, S = San Antonio Creek, V = Ventura River.

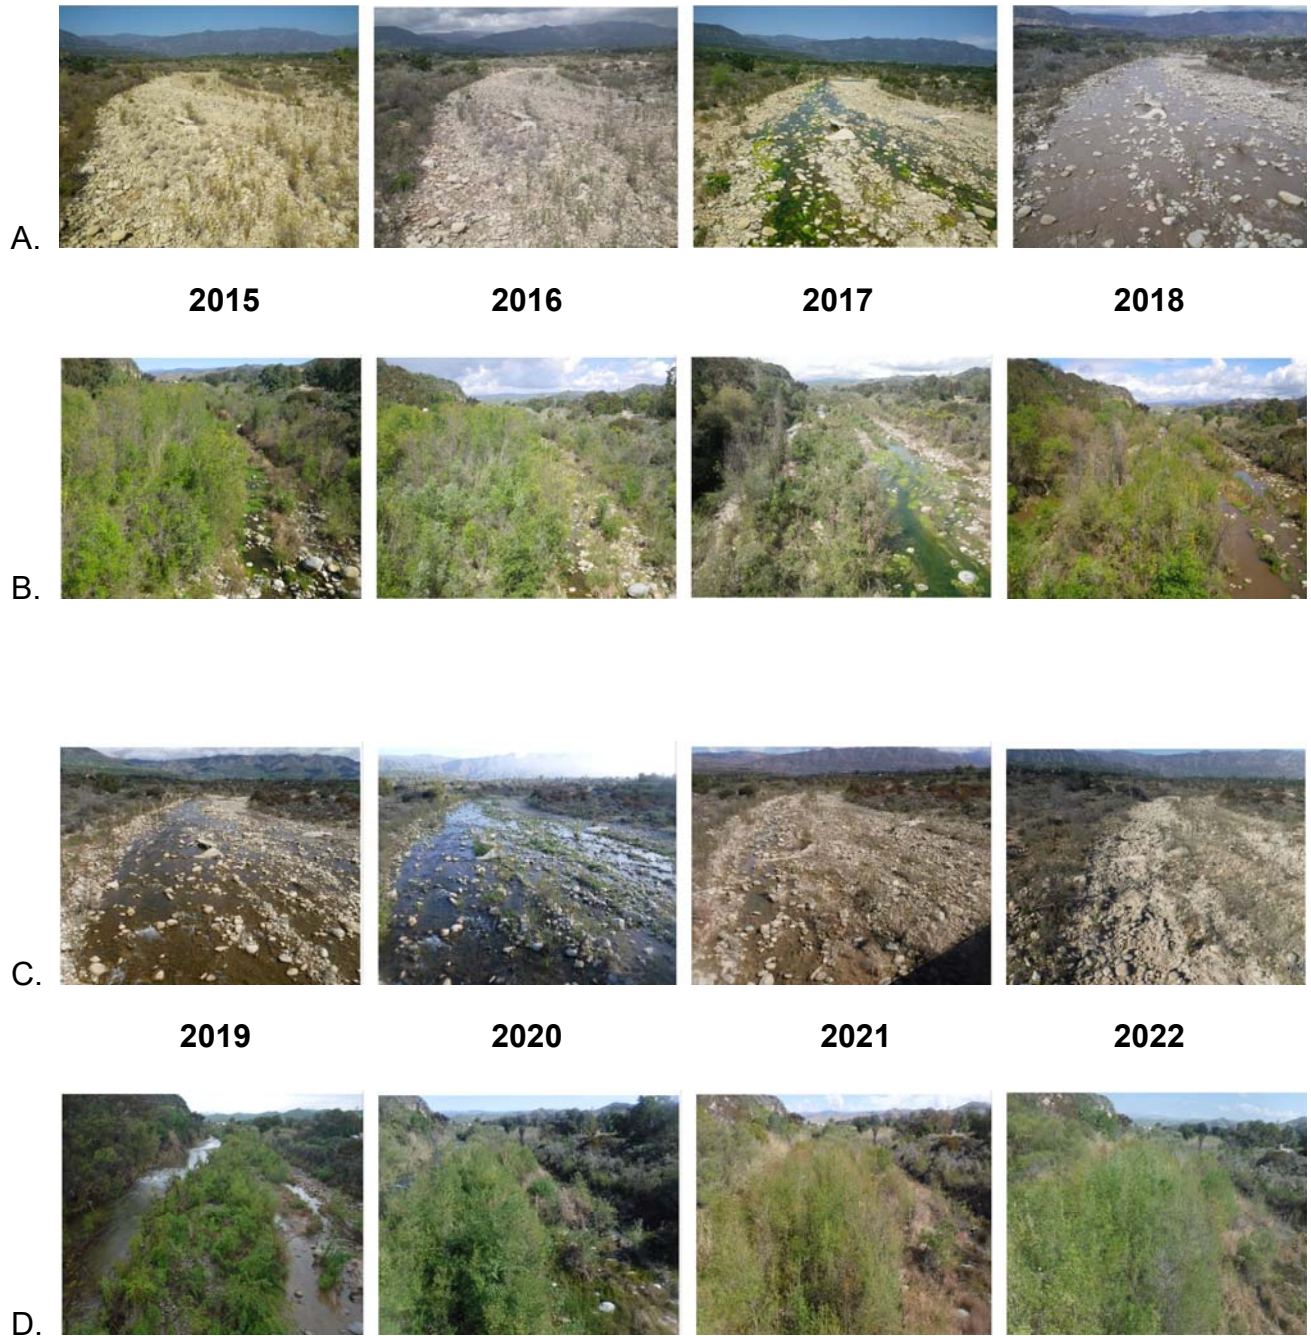

Appendix 21. Multiple year photo comparison of ephemeral and perennial reaches of the Ventura River for 2015-2022. Photo series row A and row C are looking upstream from Hwy 150 bridge. Photo series row B and row D are looking upstream from the bridge near the Shell Rd exit off Hwy 33.