



ADDENDUM NO. 1

August 17, 2026

To all prospective bidders on the Work titled: **Robles Canal Road Paving and Concrete Panel Replacement (Specification No. 26-481)**

The Drawings and Project Manual including Specifications are modified as follows. This Addendum forms a part of the Contract Documents and modifies the original documents dated July 24, 2026.

Acknowledge receipt of this Addendum in the space provided in the Bid Schedule. Failure to do so may subject the Bidder to disqualification.

This Addendum consists of two pages and two attachments,

Item AD1-1 **BID SCHEDULE. REPLACE** with the attached.

Item AD1-2 **PART C – SPECIAL CONDITIONS. REPLACE Paragraph 2.3 with:**

“2.3 Install 4,150 feet of 8-inch rolled asphalt berm with ½-inch aggregate asphalt concrete along the Robles Canal Road.”

Item AD1-3 **PART C – SPECIAL CONDITIONS. REPLACE Paragraph 2.4 with:**

“2.4 Install (2” x 6”) 4,150 linear feet of pressure-treated redwood header adjacent to asphalt concrete in the Robles Canal roadway.”

Item AD1-4 **PART D – MEASUREMENT AND PAYMENT, REPLACE Paragraph 5.4 with:**

“5.4 Bid Schedule Item No. 4 – Install Redwood Header Robles Canal Road Station 194+00 to 235+50

This work shall include the unit price to install 4,150 linear feet of 2” x 6” redwood headers with 18-inch flat steel stakes at 4 feet on center adjacent to asphalt concrete pavement replacement work.

Full compensation for Installing Redwood Header, including all labor, materials, tools, equipment and incidentals and for conforming to all applicable provisions of the Standard Specifications, these Special Provisions, and the requirements of the District shall be considered as included in the unit price paid for Bid Item 4, Install Redwood Header Robles Canal Road, complete and in-place, and no additional compensation will be allowed therefor.”

Item AD1-5 **Specification Section 03315 Part 2 – Materials, REPLACE Paragraph 2.01.C.2,:**

“2. Pozzolan: ASTM C618, Class F with a limit of 3.0 percent for ignition loss and 10 percent for CaO. Pozzolan shall be from a single source. Class F fly ash



conforming to ASTM C618 or slag cement (GGBFS), Grade 100 or Grade 120, conforming to ASTM C989, as the supplementary cementitious material may also be provided subject to Section 2.02J.”

Item AD1-6 Specification Section 03315 Part 2 – Materials, Paragraph 2.02 Concrete Mix Design, Add the following:

“J. If slag cement is used, the Contractor shall proportion the concrete mixture to achieve a minimum 28-day compressive strength of 3,000 psi and shall submit supporting mix design data demonstrating that the proposed mixture provides durability, permeability, and sulfate resistance suitable for the specified exposure conditions and equivalent to or better than the performance of the specified Class F fly ash mixture. When slag cement is proposed, the slag cement content and total cementitious material content shall be established by the approved mix design in accordance with applicable ACI 233R guidance and shall not be required to correspond on a one for one weight basis with the originally specified 90 lb/CY Class F fly ash content. The proposed mixture shall be subject to review and acceptance by the District.”

Item AD1-7 Appendix B ADD Redwood Header Detail (attached).

Acknowledgement:

By signature below, Bidder acknowledges Addendum No. 1.

Signed: _____

Attachments: Addendum No. 1 Bid Schedule
 Redwood Header Detail

END OF ADDENDUM NO. 1

BID SCHEDULE

Robles Canal Road Paving and Concrete Panel Replacement

Specification No. 26-481

Schedule of prices for all work, materials and site cleanup for the above-mentioned project and specification in accordance with these specifications. Any item not specifically mentioned shall be considered incidental to the item to which it pertains. The Bidder shall list prices for all bid items. Bids received which do not list prices in succession shall be rejected.

Bid Item #	Quantity & Unit	Description & Price in Words	Unit Price	Amount \$
1	1 LS	Mobilization/demobilization of materials and equipment to and from the project work site for the lump sum price of: Dollars.		\$
2	49,800 SF	Pulverize existing 3-inch asphalt concrete, provide and install cement-stabilized pulverized base and pave 3-inches thick with 1/2-inch aggregate asphalt concrete in the Robles Canal roadway from Station 194+00 to Station 235+50 for the unit price of: Dollars per square foot.	\$_____/SF	\$
3	4,150 LF	Install eight-inch rolled asphalt concrete berm, 1/2-inch aggregate asphalt concrete along the Robles Canal Road from Station 194+00 to Station 235+50 for the unit price of: Dollars per linear foot.	\$_____/LF	\$

Bid Item #	Quantity & Unit	Description & Price in Words	Unit Price	Amount \$
4	4,150 LF	Install (2"x 6") redwood header adjacent to asphalt concrete in the Robles Canal Road from Station 194+00 to Station 235+50 for the unit price of: Dollars per linear foot.	\$_____/LF	\$
5	15	Complete removal and disposal of a pair of unreinforced concrete side canal panels, each panel in the pair approximately 12 feet wide by 15 feet long, and replacement with reinforced concrete panels (Locations: 1B ,1D, 1F,1I, 1J, and 1K), for the unit price of: Dollars per complete pair of side panels	\$_____/EA	\$
6	3	Complete removal and disposal of a pair of unreinforced concrete bottom canal panels, each panel in the pair approximately 3.5 feet wide by 15 feet long, and replacement with reinforced concrete panels (Location: 1E),for the unit price of: Dollars per complete pair of bottom panels	\$_____/EA	\$
7	1	Complete removal and disposal of a pair of unreinforced concrete side canal panels, each panel in the pair approximately 7 feet wide by 8 feet long, and replacement with reinforced concrete panels (Location: 1G), for the unit price of: Dollars per complete pair of side panels	\$_____/EA	\$

Bid Item #	Quantity & Unit	Description & Price in Words	Unit Price	Amount \$
8	1	Complete removal and disposal of a pair of unreinforced concrete side canal panels, each panel in the pair approximately 12 feet wide by 8 feet long, and replacement with reinforced concrete panels (Location:1H), for the unit price of: Dollars per complete pair of side panels	\$_____/EA	\$
9	20 CY	Import and compaction of soil beneath replaced panels to finished grade for the unit price of: Dollars per cubic yard	\$_____/CY	\$

OPTIONAL BID ITEMS				
Bid Item #	Quantity & Unit	Description & Price in Words	Unit Price	Amount \$
10	8	Complete removal and disposal of a pair of unreinforced concrete side canal panels, each panel in the pair approximately 12 feet wide by 15 feet long, and replacement with reinforced concrete panels (Location: Opt 1, for the unit price of: Dollars per pair of complete side panels	\$_____/EA	\$

11	4	Complete removal and disposal of a pair of unreinforced concrete bottom canal panels, each panel in the pair approximately 3.5 feet wide by 15 feet long, and replacement with reinforced concrete panels (Location: Opt 2), for the unit price of:	\$_____/EA	\$
		Dollars per complete pair of bottom panels		

TOTAL BASE BID AMOUNT (Items 1 – 9) \$_____ (Figures)

(Words)

TOTAL BID AMOUNT WITH OPTIONAL BID ITEM (Items 1 – 11) \$_____ (Figures)

(Words)

Bid award will be based on total for Items 1-9. The above quantities are based on a lump sum price, measurement and payment for each bid item per Part D of these General Specifications. Bidder will not be released on account of errors. When a discrepancy occurs between the written price and the number listed, the written price shall govern. The Bidder understands that the District reserves the right to reject any or all bids, and to waive any informalities in the bidding. Pursuant to and in compliance with the Notice Inviting Bids and the other documents relating thereto, the undersigned bidder, being fully familiar with the terms of the Contract Documents, local conditions affecting the performance of the contract, the character, quality, quantities, and scope of the work, and the cost of the work at the place where the work is to be done, hereby proposes and agrees to perform within the time stipulated in the contract, including all of its component parts and everything required to be performed, and to furnish any and all of the labor, material, tools, equipment, transportation, services, permits, utilities, and all other items necessary to perform the contract and complete in a conformity with the plans and specifications and other contract documents, including **Addenda Nos. ____ , ____ , ____ , and ____**, for the prices hereinafter set forth.

Date: _____

BIDDER: _____

By: _____

Title: _____

License No. _____ Expiration Date: _____


License Classifications: _____ DIR No. _____

Telephone. No: _____ Cell No _____

Email: _____

Address: _____

(CORPORATE SEAL)

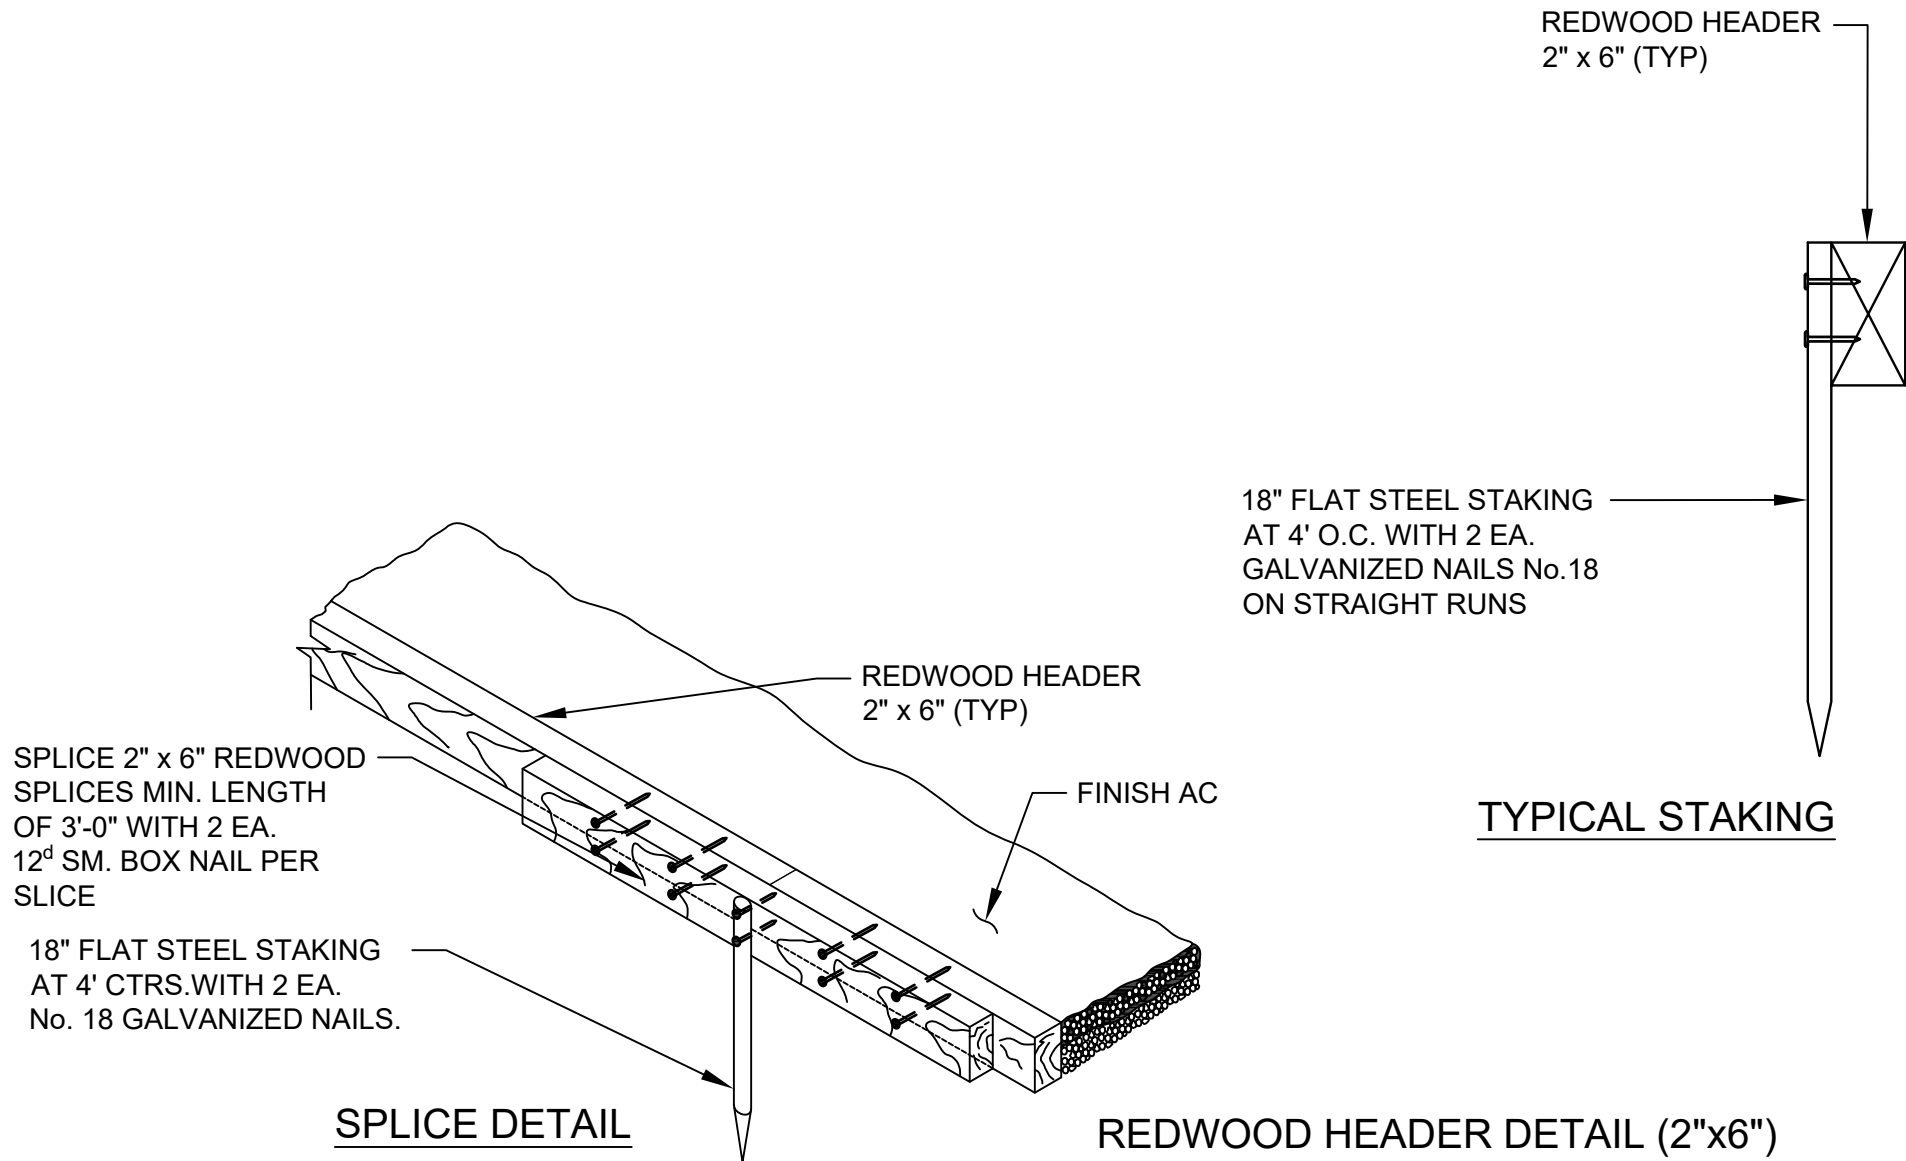

NOTES:

1. REDWOOD LUMBER SHALL CONFORM WITH ALL PARTICULAR STANDARD SPECIFICATION FOR GRADE OF CALIFORNIA REDWOOD OF THE REDWOOD INSPECTION SERVICE.
2. REDWOOD SHALL BE LUMBER GRADE No. 1.
3. THE CONSTRUCTION AND INSTALLATION OF REDWOOD HEADER SHALL BE PERFORMED IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 204-2 OF THE LATEST EDITION OF THE GREEN BOOK.

APPROVED _____
ENGINEERING MANAGER DATE:

APPROVED _____
OPERATIONS AND MAINTENANCE MANAGER DATE:

APPROVED _____
GENERAL MANAGER DATE:

REDWOOD HEADER



REV. DATE: **AUG 2026**

SD - 119